


Specifications:
 Current Rating: 0.5 A
 Voltage Rating: 50V DC
 Contact Resistance: 20m ohm Max
 Insulation Resistance: 50M Ohm Min
 Withstanding Voltage: 500V AC For One Minute
 Operating Temperature Range: -25°C~+85°C

Material:
 Plastic: High Temp Plastic (LCP UL94V-0)
 Plastic Color: White
 Contacts: Copper Alloy
 Plating: Gold / Matt Tin Plated
 Fitting Nail: Copper Alloy, Matt Tin Plated

How To Order
 1226-XX-01A
 Vertical Contact A Type
 No of Contacts



Contacts Dimension:

PIN NO	A	B	C	D	PIN NO	A	B	C	D	PIN NO	A	B	C	D	PIN NO	E
4	7.60	6.50	1.50	2.60	17	14.10	13.00	8.00	9.10	32	21.60	20.50	15.50	16.60	4-34	4.40
5	8.10	7.00	2.00	3.10	18	14.60	13.50	8.50	9.60	34	22.60	21.50	16.50	17.60	35-54	4.90
6	8.60	7.50	2.50	3.60	19	15.10	14.00	9.00	10.10	35	23.10	22.00	17.00	18.10		
7	9.10	8.00	3.00	4.10	20	15.60	14.50	9.50	10.60	36	23.60	22.50	17.50	18.60		
8	9.60	8.50	3.50	4.60	21	16.10	15.00	10.00	11.10	37	24.10	23.00	18.00	19.10		
9	10.10	9.00	4.00	5.10	22	16.60	15.50	10.50	11.60	40	25.60	24.50	19.50	20.60		
10	10.60	9.50	4.50	5.60	23	17.10	16.00	11.00	12.10	44	27.60	26.50	21.50	22.60		
11	11.10	10.00	5.00	6.10	24	17.60	16.50	11.50	12.60	45	28.10	27.00	22.00	23.10		
12	11.60	10.50	5.50	6.60	26	18.60	17.50	12.50	13.60	48	29.60	28.50	23.50	24.60		
13	12.10	11.00	6.00	7.10	27	19.10	18.00	13.00	14.10	50	30.60	29.50	24.50	25.60		
14	12.60	11.50	6.50	7.60	28	19.60	18.50	13.50	14.60	54	32.60	31.50	26.50	27.60		
15	13.10	12.00	7.00	8.10	29	20.10	19.00	14.00	15.10							
16	13.60	12.50	7.50	8.60	30	20.60	19.50	14.50	15.60							

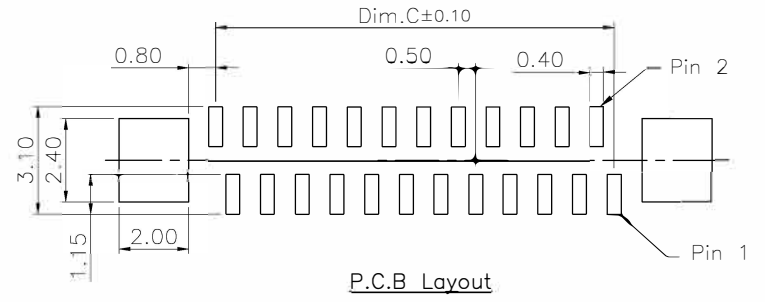


RoHS Compliant

F	11-OCT-2023	△	Jamie	DRAWN:	GENERAL TOLERANCE:	Neltron Industrial Co., Ltd.	DESCRIPTION: 0.5mm SMT Zif FPC Vertical Type Connector	SIZE A4
E	11-SEP-2023	△	Jamie	Zhou Lin	.X=±0.20 .XX=±0.15			
D	24-MAY-2023	△	Jamie	CHECKED:	UNIT: MM	PART NO: 1226-XX-01A		
C	16-DEC-2021		MEI	Jeremy Liu	SCALE: 1:1			
B	26-JAN-2021		MEI	APPROVAL:	SHEET: 1/2			
A	15-Nov-2009		Zhou Lin	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					

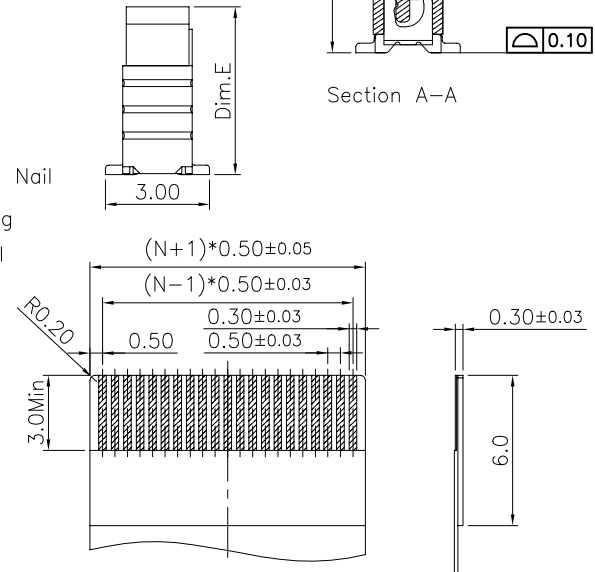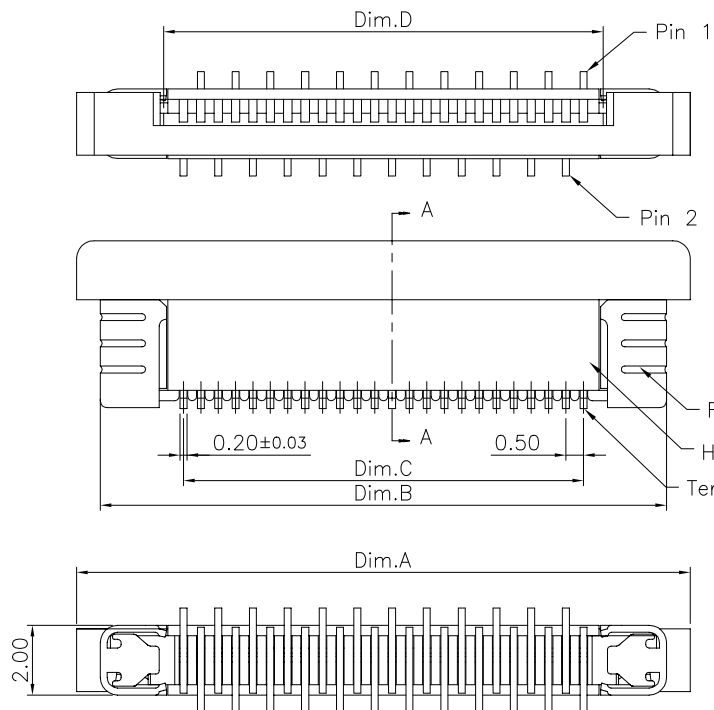

Specifications:
 Current Rating:0.5 A
 Voltage Rating:50V DC
 Contact Resistance:20m ohm Max
 Insulator Resistance:50M Ohm Min
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-25°C~+85°C




Material:
 Plastic: High Temp Plastic (LCP UL94V-0)
 Plastic Color: White
 Contacts: Copper Alloy
 Plating: Gold / Matt Tin Plated
 Fitting Nail: Copper Alloy, Matt Tin Plated.

How To Order
 1226-XX-01B
 Vertical Contact B Type
 No Of Contacts

Contacts Dimension:

PIN NO	A	B	C	D	PIN NO	A	B	C	D	PIN NO	A	B	C	D	PIN NO	E
4	1.50	2.60	7.60	6.50	17	8.00	9.10	14.10	13.00	32	15.50	16.60	21.60	20.50	4-34	4.40
5	2.00	3.10	8.10	7.00	18	8.50	9.60	14.60	13.50	34	16.50	17.60	22.60	21.50	35-54	4.90
6	2.50	3.60	8.60	7.50	19	9.00	10.10	15.10	14.00	35	17.00	18.10	23.10	22.00		
7	3.00	4.10	9.10	8.00	20	9.50	10.60	15.60	14.50	36	17.50	18.60	23.60	22.50		
8	3.50	4.60	9.60	8.50	21	10.00	11.10	16.10	15.00	37	18.00	19.10	24.10	23.00		
9	4.00	5.10	10.10	9.00	22	10.50	11.60	16.60	15.50	40	19.50	20.60	25.60	24.50		
10	4.50	5.60	10.60	9.50	23	11.00	12.10	17.10	16.00	44	21.50	22.60	27.60	26.50		
11	5.00	6.10	11.10	10.00	24	11.50	12.60	17.60	16.50	45	22.00	23.10	28.10	27.00		
12	5.50	6.60	11.60	10.50	26	12.50	13.60	18.60	17.50	48	23.50	24.60	29.60	28.50		
13	6.00	7.10	12.10	11.00	27	13.00	14.10	19.10	18.00	50	24.50	25.60	30.60	29.50		
14	6.50	7.60	12.60	11.50	28	13.50	14.60	19.60	18.50	54	26.50	27.60	32.60	31.50		
15	7.00	8.10	13.10	12.00	29	14.00	15.10	20.10	19.00							
16	7.50	8.60	13.60	12.50	30	14.50	15.60	20.60	19.50							

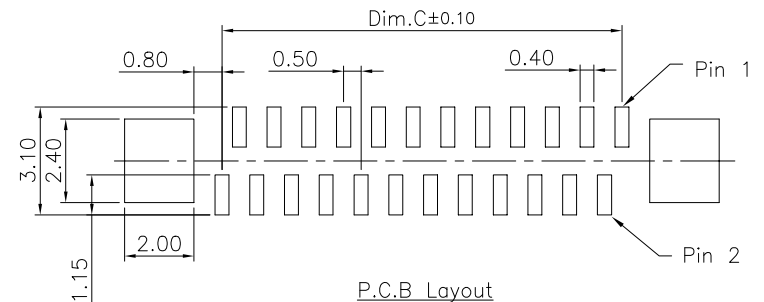

RoHS Compliant

H				DRAWN:	GENERAL TOLERANCE:	Neltron Industrial Co., Ltd.	SIZE
G	11-OCT-2023		Jamie	Zhou Lin	.X=±0.20 .XX=±0.15		
F	24-MAY-2023		Jamie	CHECKED:	UNIT: MM	DESCRIPTION: 0.5mm SMT Zif FPC Vertical B Type Connector	A4
E	16-DEC-2021	UPDATE DWG	MEI	Jeremy Liu	SCALE:		
D	15-Nov-2009	ECN-CN091118	Zhou Lin	APPROVAL:	SHEET: 1 / 1	PART NO: 1226-XX-01B	
C	23-Nov-2005		Wendy	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				