

Pos	A	B	C	Pos	A	B	C
4	7.00	3.81	5.60	16	22.24	19.05	20.84
6	9.54	6.35	8.14	18	24.78	21.59	23.38
8	12.08	8.89	10.68	20	27.32	24.13	25.92
10	14.62	11.43	13.22	22	29.86	26.67	28.46
12	17.16	13.97	15.76	24	32.40	29.21	31.00
14	19.70	16.51	18.30	26	34.94	31.75	33.54


Specifications:

Current Rating:1.5A AC/DC
 Voltage Rating:230V AC/DC
 Contact Resistance:20m Ohm. Max.
 Insulation Resistance:1000M Ohm. Min.
 Withstanding Voltage:AC 500V AC/Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material And Finish
 Insulator:High Temp. Plastic(Nylon 46 UL94V-0)
 Insulator Color:Red
 Contact Material:Phosphor Bronze
 Finish:Tin Plated
 Package:800PCS/Reel

How To Order

4409SM-XX-CR

White Cap+Tape&Reel
 No.Of Positions
 SMD Type

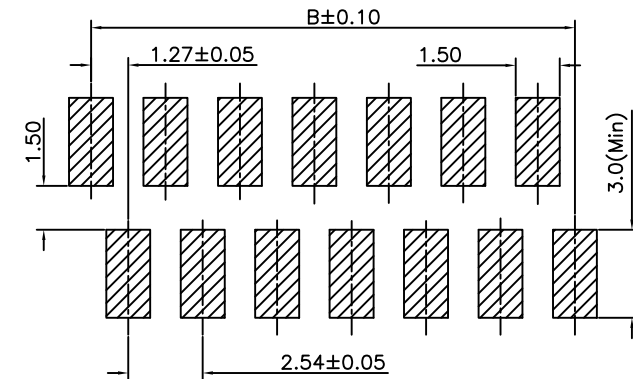

PCB Layout

RoHS Compliant

DRAWN:

Romina Wu

CHECKED:

Jerry Chen

APPROVAL:

Mike Wu

GENERAL TOLERANCE:

.X=±0.2
.XX=±0.15

UNIT: MM

SCALE: 1 : 1

SHEET: 1 / 1

PROJECTION:



Neltron Industrial Co., Ltd.

DESCRIPTION:

2.54mm PCB Connector SMD Type

PART NO:

4409SM-XX-CR

SIZE

A4

REV	DATE	FILE	BY
A	28-May-2019		Romina Wu