




1

2

3

4

5

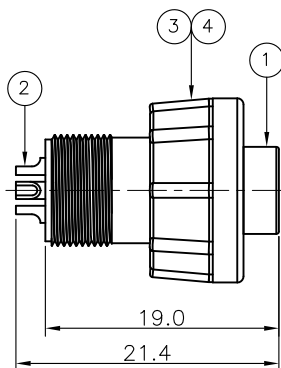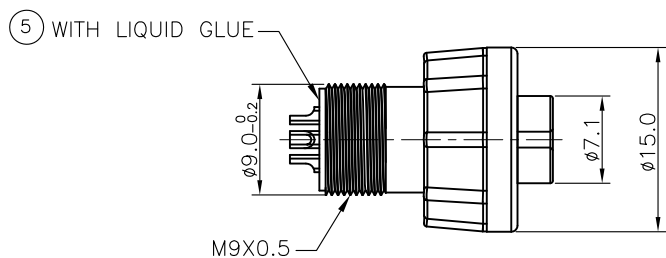

## Specifications:

Current Rating:2A AC/DC

Withstanding Voltage:500V AC/Minute

Operating Temperature Range:-40°C ~ +100°C

Material and Finish


See Table

How to Order


120511-XXS-A-MM2AXX

Blank:O-Ring Color Red  
 BK:O-Ring Color Black  
 Molding  
 A Coding  
 Socket  
 No.of Contacts


## PIN ASSIGNMENTS (FRONT VIEW)



4PIN



5PIN



6PIN

ITEM	Description	Material	Remark	Q'TY
1	Insulator	Nylon+GF	Black	1
2	Terminal	Copper Alloy	Gold Plated Over Nickel	4~6
3	Nut	Nylon+GF	Black or Red	1
4	O-Ring	Silicone	Red	1
5	Liquid Glue	N/A	Black	A/R

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C			
B	18-Oct-2019	add o-ring color	Andrew
A	10-Jul-2019		Andrew

DRAWN:  
Andrew

CHECKED:  
Bill He

APPROVAL:  
Norman

## GENERAL TOLERANCE:

.X=±0.3

.XX=±0.2

.XXX=±0.10

UNIT: MM

SCALE: 1:1

SHEET: 1/1

PROJECTION:


**Neltron Industrial Co., Ltd.**

DESCRIPTION:

CIRCULAR CONN. SOCKET MINI SIZE(2A) SOLDER FOR OVERMOLDED

PART NO:

120511-XXS-A-MM2AXX

SIZE

**A4**