

Specifications:
 Current Rating: 0.5A AC,DC
 Voltage Rating: 50V AC,DC
 Contact Resistance: 100m ohm.Max
 Insulation Resistance: 500M ohm.Min
 Withstanding Voltage: 150V AC/Minute
 Operating Temperature Range: -55°C ~ +105°C

Material:
 Insulator: LCP(UL94V-0)
 Insulator Color: Black
 Terminal: Phosphor Bronze
 Plated: Selective Gold
 Solder Pad: Phosphor Bronze
 Plated: Matte Tin

How To Order
 1226-XX-10-H28-TR
 Tape&Reel
 Plastic Height=2.8mm
 NO.of Contacts

Dimension Information:

Pos	Dim.A	Dim.B	Dim.C	Dim.D
8	11.70	3.50	6.15	8.90
10	12.70	4.50	7.15	9.90
16	15.70	7.50	10.15	12.90
18	16.70	8.50	11.15	13.90
20	17.70	9.50	12.15	14.90
30	22.70	14.50	17.15	19.90

RoHS Compliant


F				DRAWN: ZONGYI	GENERAL TOLERANCE: .X=±0.20 .XX=±0.10
E					
D				CHECKED: JERRY	UNIT: MM
C	15-AUG-2023	Add 18P Option	LISY		SCALE: 1:1
B	13-MAR-2022	新增平整度	ZONGYI	APPROVAL: MIKE WU	SHEET: 1/3
A	08-AUG-2018		ZONGYI		PROJECTION:
REV	DATE	FILE	BY		

Neltron Connectors **Neltron Industrial Co., Ltd.**


DESCRIPTION: 0.5mm FPC Double Contact Type

PART NO: 1226-XX-10-H28-TR


SIZE
A4

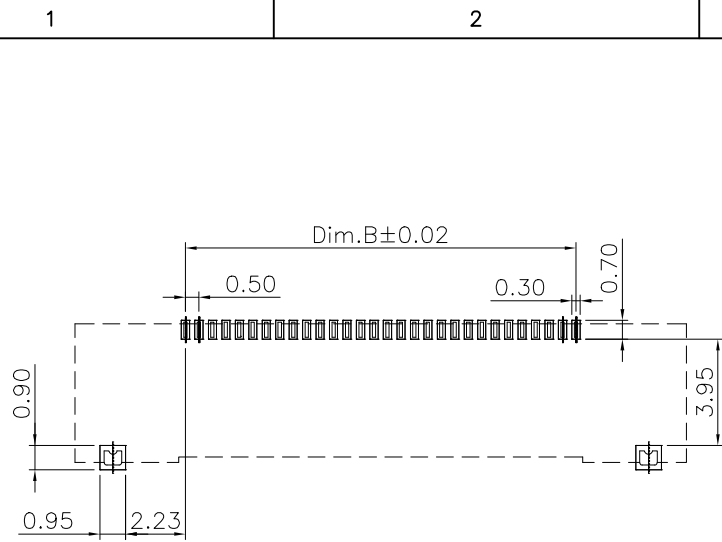

P.C.B LAYOUT

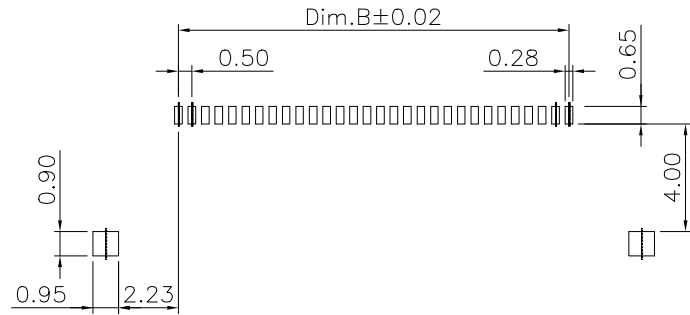

RECOMMENDED METAL MASK PATTERN

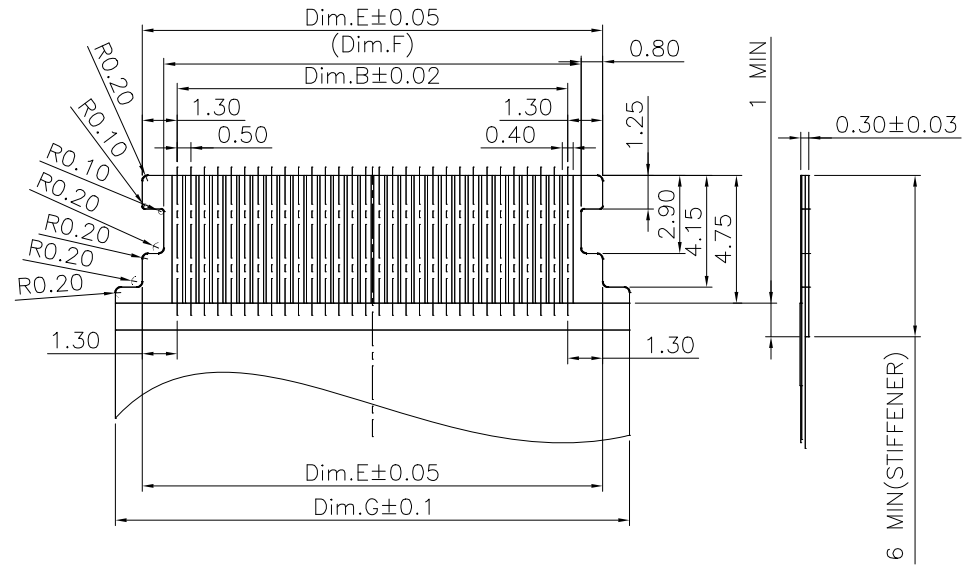

Dimension Information:

Pos	Dim.B	Dim.E	Dim.F	Dim.G
8	3.50	6.10	4.50	7.50
10	4.50	7.10	5.50	8.50
16	7.50	10.10	8.50	11.50
18	8.50	11.10	9.50	12.50
20	9.50	12.10	10.50	13.50
30	14.50	17.10	15.50	18.50



RoHS Compliant

F				DRAWN: ZONGYI
E				
D				CHECKED: JERRY
C	15-AUG-2023	Add 18P Option	LISY	
B	13-MAR-2022	新增平整度	ZONGYI	APPROVAL: MIKE WU
A	08-AUG-2018		ZONGYI	
REV	DATE	FILE	BY	

GENERAL TOLERANCE: .X=±0.20 .XX=±0.10
UNIT: MM
SCALE: 1:1
SHEET: 2/3
PROJECTION:

Neltron Industrial Co., Ltd.	
DESCRIPTION: 0.5mm FPC Double Contact Type	SIZE A4
PART NO: 1226-XX-10-H28-TR	