



Specifications:

Current Rating: 1.0A AC/DC
 Voltage Rating: 100V AC/DC
 Contact Resistance: 30m Ohm. Max.
 Insulation Resistance: 100M Ohm. Min.
 Dielectric Withstanding Voltage: 500V R.m.s (for one minute)
 Operating Temperature Range: -25°C ~ +85°C $\triangle E$
 Material and Finish
 Insulator: Nylon 6T (UL94V-0) $\triangle E$
 Layer: Nylon 46 (UL94V-0) $\triangle E$
 Contact: Copper Alloy
 Plating: Gold/Tin plated $\triangle C$
 1223-XXX-03-H29-XX

- Blank Tube
- TR: Tape & Reel
- Height: 2.90mm
- Top contact type
- Blank Tin Plated
- G: Gold Plated
- No. of Contacts

$\triangle D$ Contact Dimension

No. Of Pin	DimA	DimB	DimC	No. Of Pin	DimA	DimB	DimC
3	2.0	4.2	10.4	14	13.0	15.2	21.4
4	3.0	5.2	11.4	15	14.0	16.2	22.4
5	4.0	6.2	12.4	16	15.0	17.2	23.4
6	5.0	7.2	13.4	18	17.0	19.2	25.4
8	7.0	9.2	15.4	20	19.0	21.2	27.4
9	8.0	10.2	16.4	22	21.0	23.2	29.4
10	9.0	11.2	17.4	23	22.0	24.2	30.4
12	11.0	13.2	19.4	28	27.0	29.2	35.4
13	12.0	14.2	20.4	30	29.0	31.2	37.4

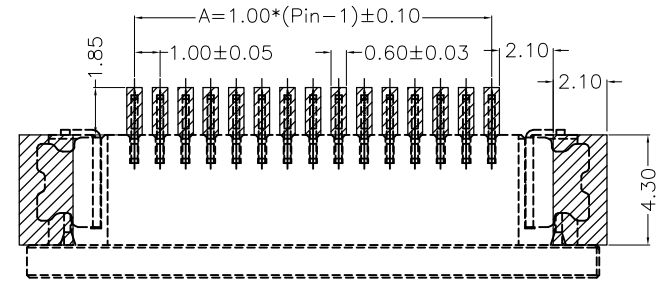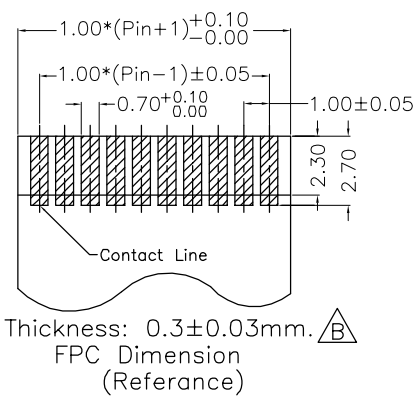

RoHS Compliant

E	29-Oct-2020	$\triangle E$	Romina Wu	DRAWN: Sea	GENERAL TOLERANCE: .X = ±0.2 .XX = ±0.15	Neltron Industrial Co., Ltd.	DESCRIPTION: 1.0 mm FPC Top Contact type	SIZE A4
D	26-Aug-2019	Modify Contact Dimension	Jamie Wang	CHECKED: Jeremy Liu				
C	27-May-2019	$\triangle C$	Sea	APPROVAL: Mike Wu	UNIT: MM	PART NO: 1223-XXX-03-H29-XX $\triangle C$		
B	17-Aug-2010	ECN-CN1008008	Sea		SCALE: 1:1			
A	30-Jul-2009		Sea		SHEET: 1 / 1			
REV	DATE	FILE	BY		PROJECTION:			