
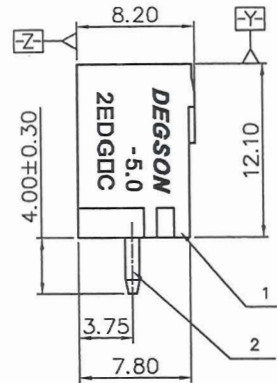
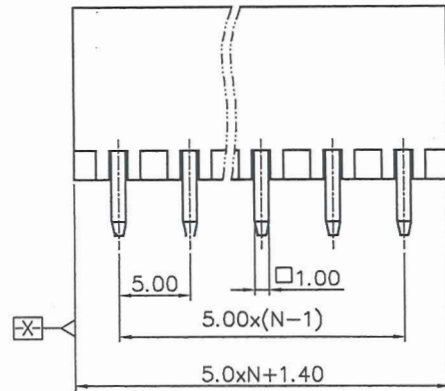


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

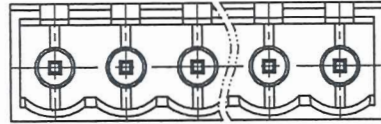

NOTES1:

UL Standard

1. Rated Voltage/Current : 300V / 15A
2. Withstanding Voltage : AC1600V/1Min.

IEC Standard

1.



Pollution Degree	2
Overtoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.0mm, Poles : N=02~06P
3. Operating temperature: -40°C~+105°C
4. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm					—	∩	∇
To	Over	To	Over	To	Over	To	To	To	
6	10	10	24	30	60	100	150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	<	

5. RoHS Compliance

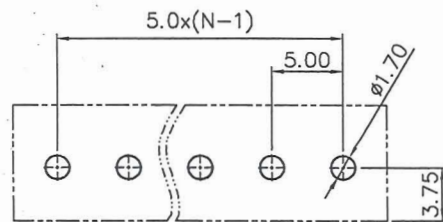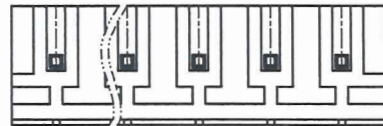

PCB LAYOUT



2	PIN	COPPER ALLOY	Sn PALTED
1	HOUSING	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.: /		宁波高松电子有限公司	
APPD: <i>Arion 12/18</i>		DEGSON <sup>®</sup> NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD: <i>Xm 12/1/14</i>		NAME: 2EDGVC-5.0-XXP-1Y-00A(H) •	
DRFT: XLM 12/07/15"		TITLE: CUSTOMER DRAWING	
THIRD ANGLE PROJECTION		REV	TO
DRAWING NO.: 2EDGVC-5.0-C22		SHEET	1/1
MM (INCH)		SCALE	1:1
		DO NOT SCALE DRAWING	

