






PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150
	±0.10	±0.15	±0.25	±0.20	±0.30	±0.50
				±0.70	±1.00	0.05/1.0


A

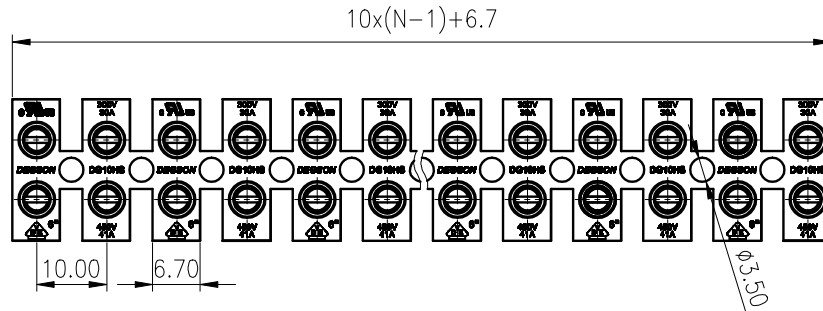

B

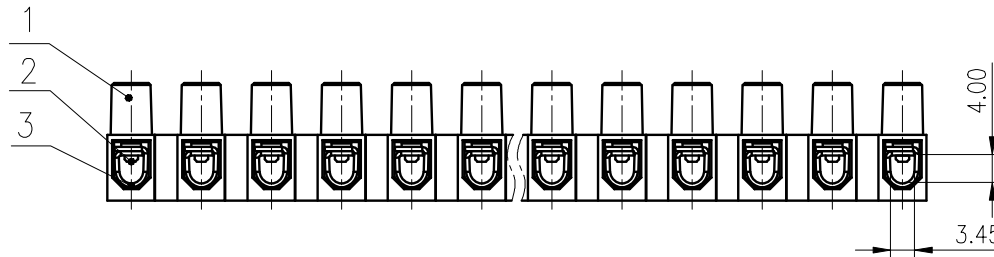

C

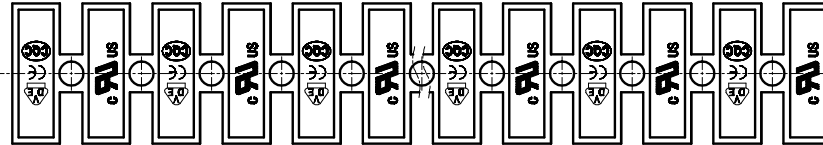

D

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Steel	Zn Plated
2	Screws	Steel	Zn Plated
1	Housing	PA66	UL94V-2
UL 标准/UL Standard:		B	C
额定电压/电涌/Rated Voltage(V)/Current(A)		300/30	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电涌/Rated Voltage(V)/Current(A)		/	450/41
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	2.5
螺栓扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		1~6/18~10	
间距/Pitch(mm)/线数范围/Poles		10.0	
剥线长度/Stripping length(mm)		9	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD:	NAME: DG10HS-1.2-XXP-1Y-100A(H)		
CHKD:			
DRFT: ZDZ 2014.01.10	DRAWING NO.: DG10HS-C06	REV	TO
④	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6