

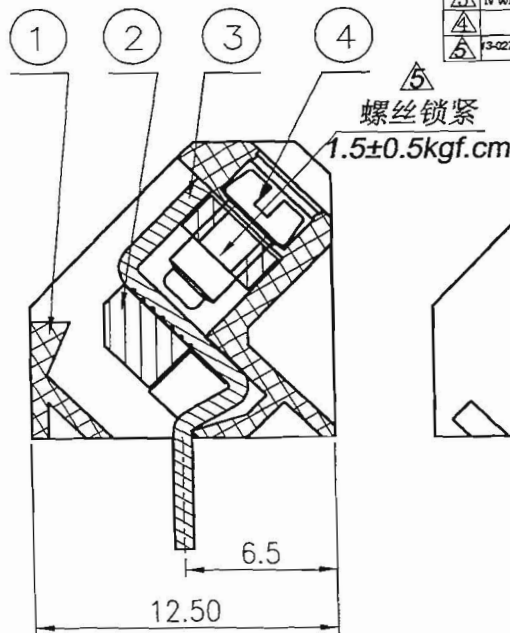


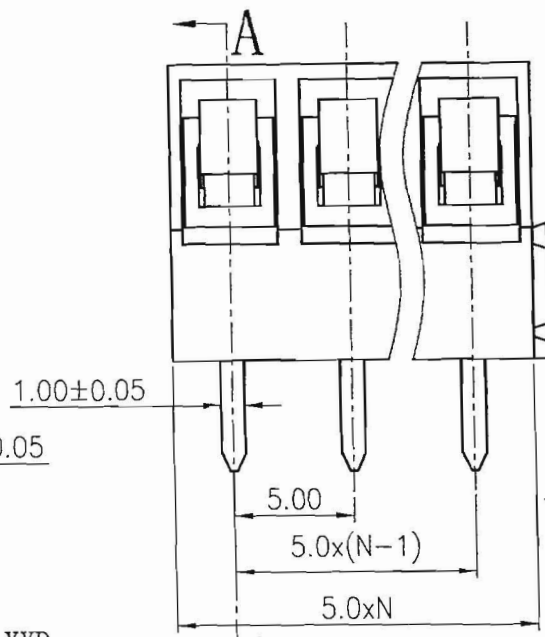

REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加VDE、CE标志	LJH	12/26/07	
△		图面更新	WLM	08/02/08	H
△	10-019	零件号由D1RFRD006变更为D1RFRD006	COCO	09/27/10	
△		图面更新	CHEN	10/30/12	
△	13-0276	增加螺丝拧紧标准	WHZ	11/05/13	

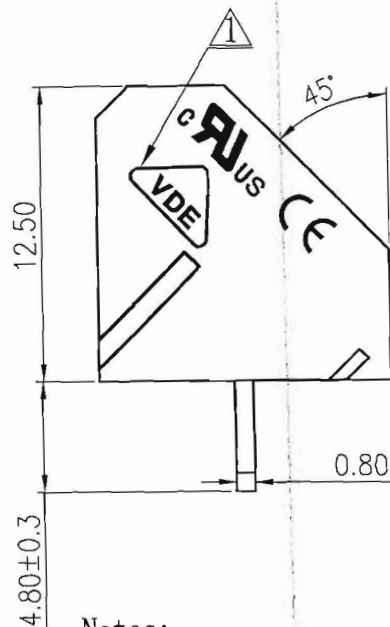

- Notes:
- Pitch: 5.0mm, Poles: 2-XXP
  - Rated voltage/current: UL 300V/15A  
VDE 250V/24A
  - Operation temperatures: -40°C ~ +105°C
  - Withstanding Voltage: AC2000V/1min
  - Insulation Resistance: 5000MΩ / DC1000V
  - Wire Range: 22-12AWG, 2.5mm<sup>2</sup>
  - Torque Value: M2.5, 4.08kgf.cm
  - Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6	over 10	over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∩	
							◇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG330 "—" Screw △	S000005330 (H) △	XX	Steel	Cr <sup>3+</sup> Zn
3	DG330-Pin header	4011B00010 (H)	XX	Brass	Sn plated
2	DG330-Cage	X000000330 (H)	XX	Brass	Ni plated
1	DG330-5.0-Housing	4011A0YXXA (H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO ZYH	DATE 08/18/07	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
	MFO	DATE		
	APPVL Alex	DATE 1/30/13		
MM		MATERIAL:		NAME DG330-5.0-XXP-1Y-00A (H)
.0 ±	±	G.E.:		DRAWING NO. DG330-5.0-E02
.00 ±	±	FINISH:		/PART NO.
.000 ±	±	SCALE: 1:1		DO NOT SCALE DRAWING
ANGLES ± 1°				SHEET 1 OF 1
THIRD ANGLE PROJECTION				REV T5 11/05/13