



- Notes:
1. Pitch: 5.0mm, Poles: 2-XXP
 2. Rated voltage/current: UL 300V/15A
VDE 250V/24A
 3. Operation temperatures: -40°C ~ +105°C
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 22-12AWG, 2.5mm²
 7. Torque Value: M2.5, 4.08kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6	over 10	over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∅	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

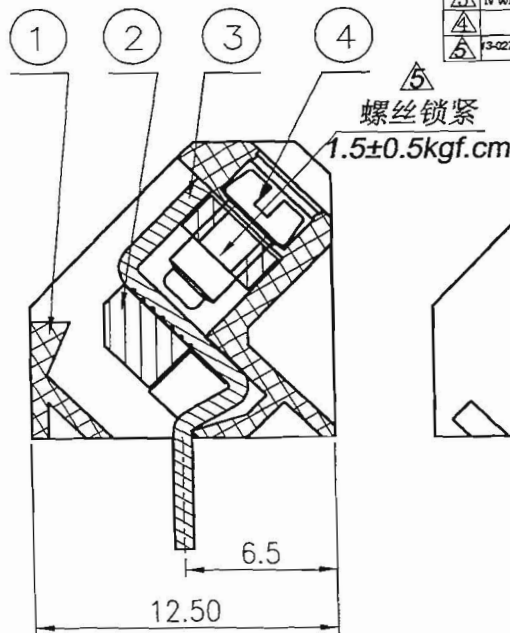

SECTION A-A

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加VDE、CE标志	LJH	12/26/07
△		图面更新	WLM	08/02/08
△	10-019	零件号由D1RFRD006变更为D1RFRD006	COCO	09/27/10
△		图面更新	CHEN	10/30/12
△	13-0276	增加螺丝拧紧标准	WHZ	11/05/13

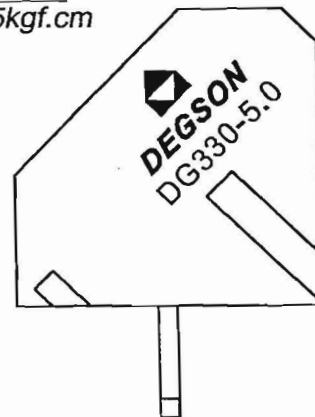

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG330 "—" Screw △	S000005330 (H) △	XX	Steel	Cr ³⁺ Zn
3	DG330-Pin header	4011B00010 (H)	XX	Brass	Sn plated
2	DG330-Cage	X000000330 (H)	XX	Brass	Ni plated
1	DG330-5.0-Housing	4011A0YXXA (H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO ZYH	DATE 08/18/07	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG330-5.0-XXP-1Y-00A (H) DRAWING NO. DG330-5.0-E02 /PART NO. SIZE A3 REV T5 11/05/13
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
	MFO	DATE		
	APPLY	DATE	11/30/13	
MM		MATERIAL :		
.0 ±	±	G.E. :		
.00 ±	±	FINISH :		
.000 ±	±	SCALE : 1:1	DO NOT SCALE DRAWING	
ANGLES ± 1°			SHEET 1 OF 1	
THIRD ANGLE PROJECTION				