


公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



3	Bridgework	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/ 线数范围/Poles		10.00/N=02~10P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /	SURFACE: /		
MAT NO.: /	<b>宁波高松电子有限公司</b> <b>NINGBO DEGSON ELECTRICAL CO., LTD</b>		
STATUS: /			
APPD: Li GL 2020.06.04	NAME: <b>DFA10-XXP-1Y-00A(H)</b>		
CHKD: Mao J 2020.06.04	DRAWING NO.: DFA10-C01		REV TO
DRFT: ZhengQC 2020.06.04	TYPE: CUSTOMER DRAWING		SCALE: 4:1 SHEET 1/1
④	SIZE: A4	mm (inch)	

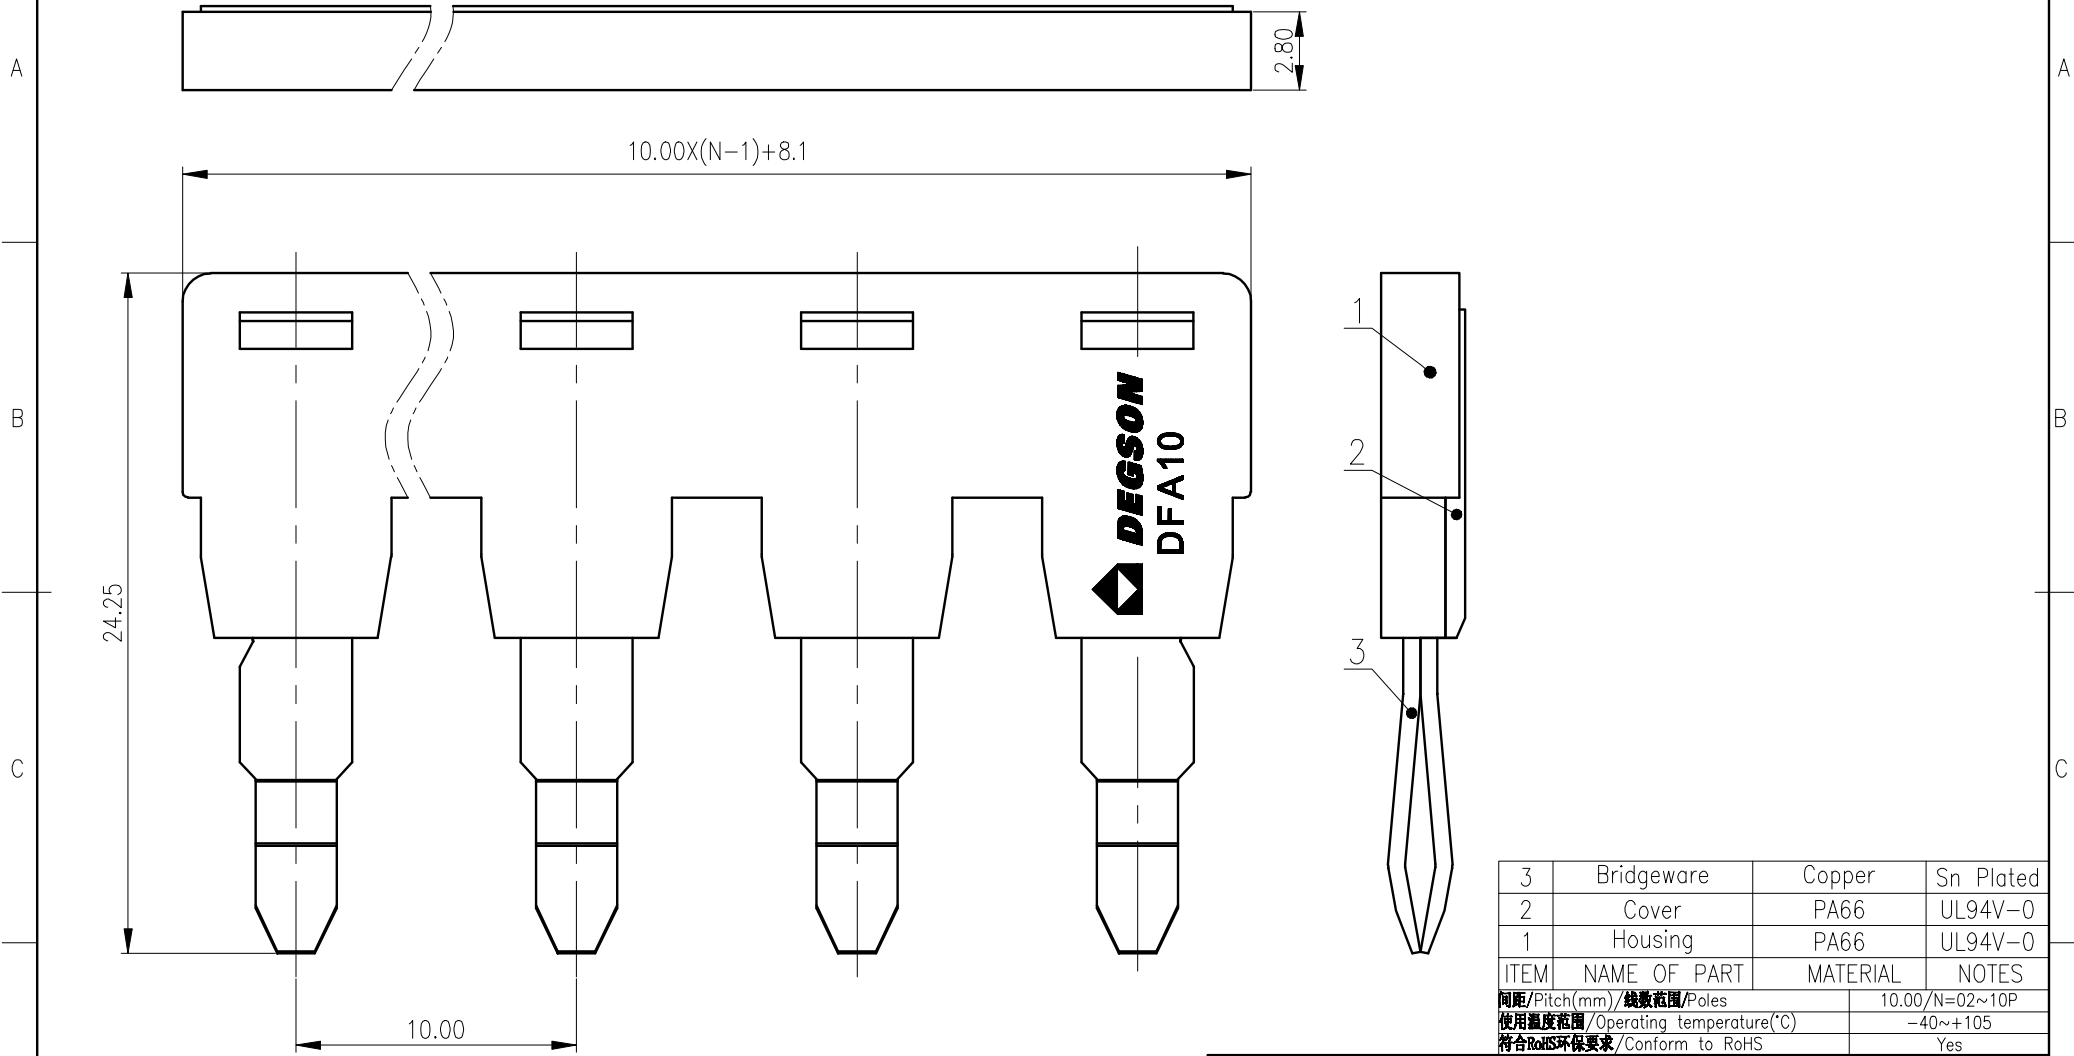

REV	ECN	DESCRIPTION	DRFT	DATE