

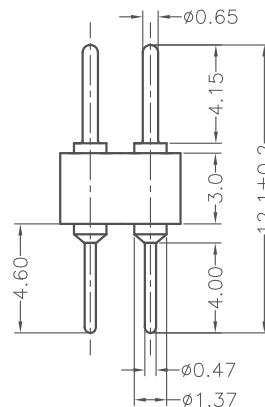
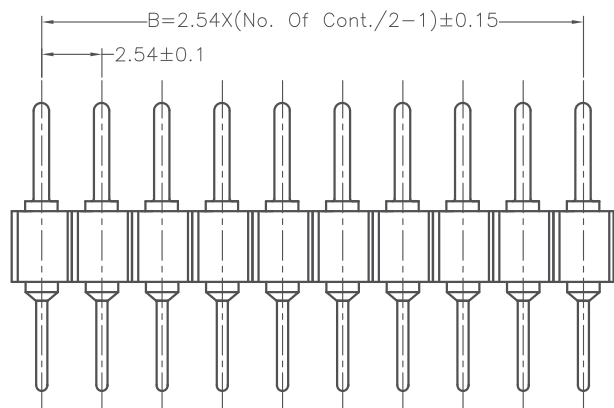


active

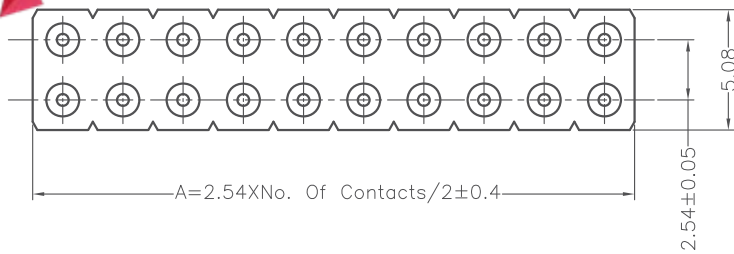

Specifications


Current Rating:3.0 Amps
 Voltage Rating:100V AC/DC
 Contact Resistance:10m Ohm. Max.
 Insulator Resistance:5,000M Ohm. Min.
 Withstanding Voltage:1,000V AC for One Minute
 Operating Temperature Range:-40°C~+105°C
 Material and Plated

Insulator:High Temp. Plastic(PPS UL94V-0)
 Insulator Color:Black

Contact:Brass
 Plated:Gold Plated


How To Order

6604PB-XXG-121

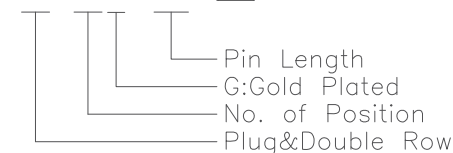

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
4	5.08	2.54	24	30.48	27.94	44	55.88	53.34	64	81.28	78.74
6	7.62	5.08	26	33.02	30.48	46	58.42	55.88	66	83.82	81.28
8	10.16	7.62	28	35.56	33.02	48	60.96	58.42	68	86.36	83.82
10	12.70	10.16	30	38.10	35.56	50	63.50	60.96	70	88.90	86.36
12	15.24	12.70	32	40.64	38.10	52	66.04	63.50	72	91.44	88.90
14	17.78	15.24	34	43.18	40.64	54	68.58	66.04	74	93.98	91.44
16	20.32	17.78	36	45.72	43.18	56	71.12	68.58	76	96.52	93.98
18	22.86	20.32	38	48.26	45.72	58	73.66	71.12	78	99.06	96.52
20	25.40	22.86	40	50.80	48.26	60	76.20	73.66	80	101.60	99.06
22	27.94	25.40	42	53.34	50.80	62	78.74	76.20			

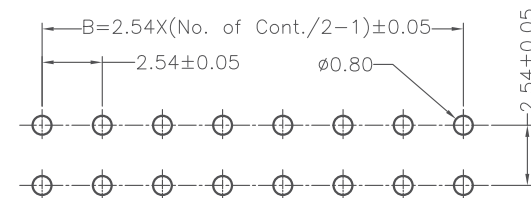

PCB LAYOUT

RoHS Compliant

E				DRAWN: Cel King	GENERAL TOLERANCE: X.X=±0.2 X.XX=±0.15	Neltron Industrial Co., Ltd.	
D				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: 2.54mm Machine Pin Header Double Row
C	22-Feb-2011		Richie	APPROVAL: MIKE WU	SCALE:	PART NO:	A4
B	28-Dec-2006		Henry		SHEET: 1 / 1	6604PB-XXG-121	
A	07-Jun-2006		Cel King		PROJECTION:		
REV	DATE	FILE	BY				