




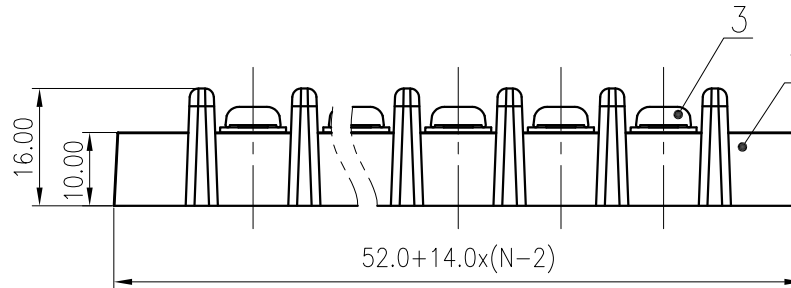

Pitch Range In mm			Nominal Dimension Range In mm						
	Over 6 TO 10	Over 10 TO 24		Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10	
TO 6			±0.30	±0.50	±0.70	±1.00	±1.30	±2'	∠

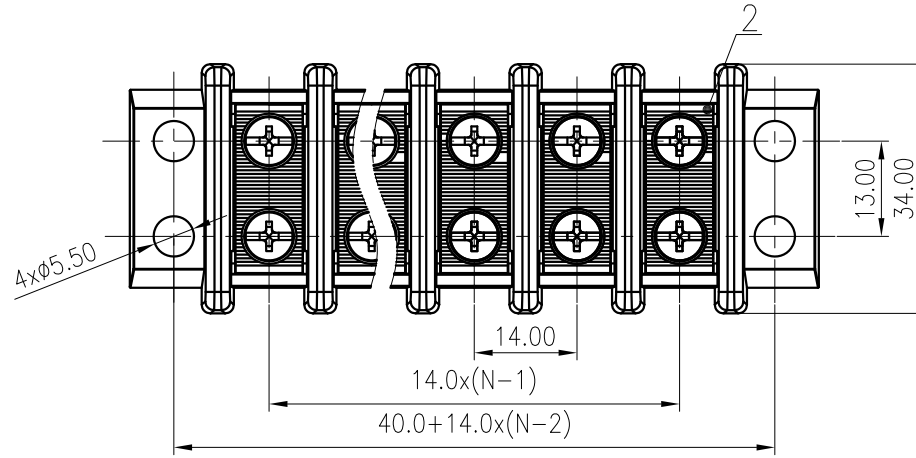

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/30	300/30	600/5
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	750/41	1000/41	1000/41
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	8	6
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	6/22~10		
间距/Pitch(mm)/线数范围/Poles	14.0/N=02~18P		
使用温度范围/Operating temperature(°C)	-40~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

REV	ECN	DESCRIPTION	DRFT	DATE

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PC	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	/		
CHKD:	/		
DRFT: Wu NK 2020.06.12	NAME: DG89-A-XXP-1Y-00A(H)		
DRAWING NO.: DG89-C01		REV	TO
TYPE: CUSTOMER DRAWING		SCALE: 1:1	SHEET 1/1