


Specifications:  
 Current Rating: 0.3A AC,DC  
 Voltage Rating: 30V AC,DC  
 Contact Resistance: 90m ohm.Max  
 Insulation Resistance: 50M ohm.Min  
 Withstanding Voltage: 100V AC/Minute  
 Operating Temperature Range: -35°C~+85°C







Material:  
 Insulator: LCP(UL94V-0)  
 Insulator Color: Black  
 Contact: Phosphor bronze  
 Plated: Gold

How To Order  
 2004S-XXG-A295-TR

Tape & Reel  
 G:Gold Plated  
 No of Contacts  
 S:Socket

Dimension Information:

Pin.No	Dim.A	Dim.B
10	4.60	1.60
20	6.60	3.60
30	8.60	5.60
40	10.60	7.60
50	12.60	9.60
60	14.60	11.60

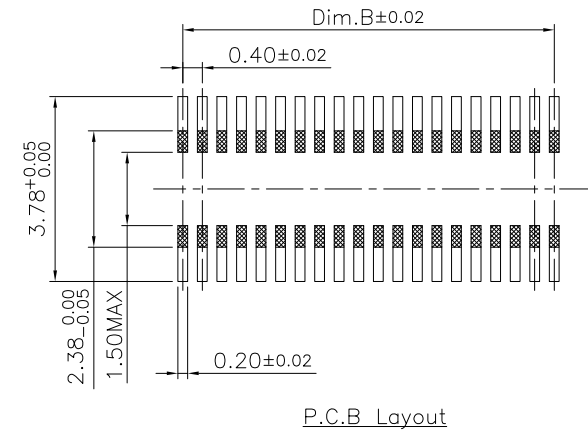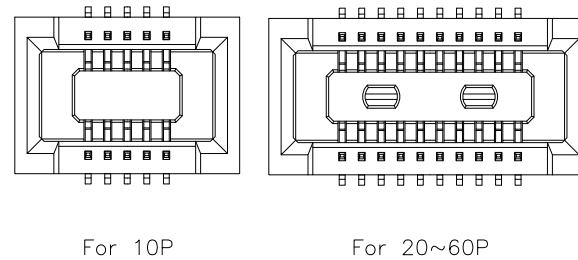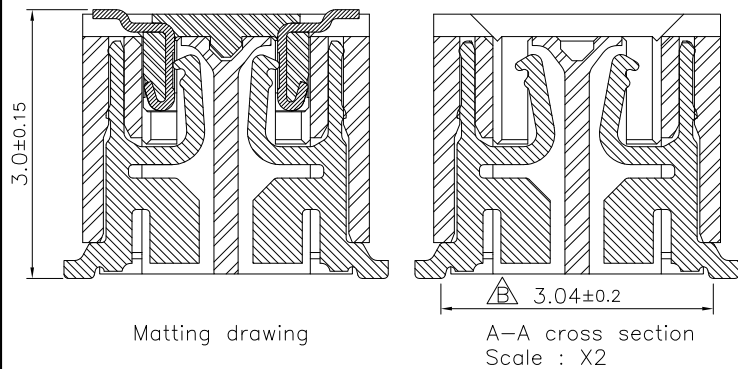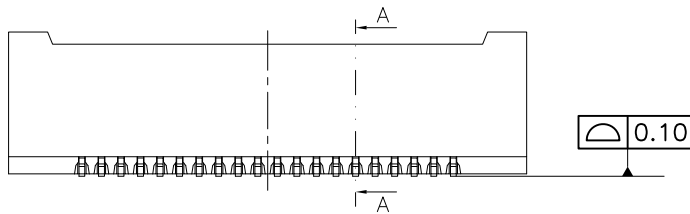

RoHS Compliant

F				DRAWN: ZONGYI	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<b>Neltron Industrial Co., Ltd.</b>	DESCRIPTION: 0.4mm BOARD TO BOARD MATED HEIGHT 3.0mm SOCKET CONNECTOR	SIZE
E								
D				CHECKED: BEN	UNIT: MM	PART NO: 2004S-XXG-A295-TR	SIZE <b>A4</b>	
C	09-JAN-2023	Change 10PIN Packing Diagram	BEN					
B	16-AUG-2022		BEN	APPROVAL: ZONGYI	SCALE: 1:1			
A	04-DEC-2020		ZONGYI					
REV	DATE	FILE	BY	RORY	PROJECTION:			