

Specifications:




Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1500V AC For One Minute
 Operating Temperature Range:-40°C To +105°C

Materials:

Insulator:Nylon66 (UL94V-0)
 Insulator Color:White
 Contact:Copper Alloy
 Plating:Tin Plated




How To Order

2269R-XX-PG-01-V0F4A

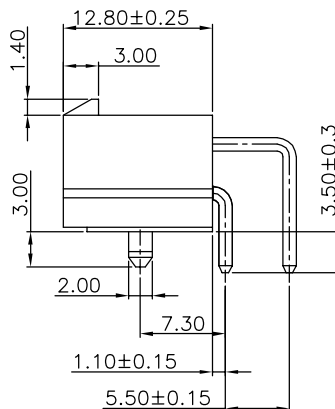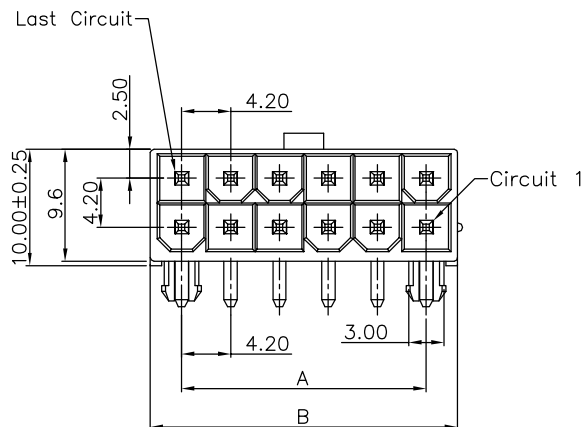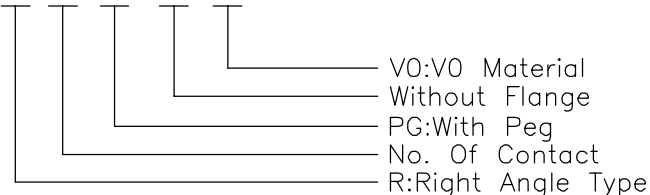

Dimension Information:

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	—	5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

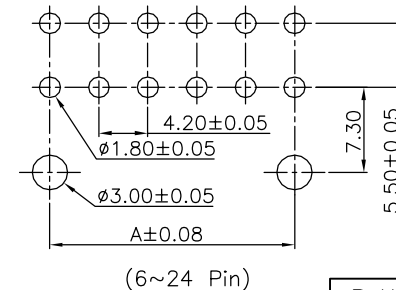

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

F				
E				
D				
C	15-MAR-2021	Update	MEI	
B	29-Jun-2020	ECO-TW200004	Romina Wu	
A	28-Jul-2016		Jamie Wang	
REV	DATE	FILE	BY	

DRAWN:	Jamie Wang
CHECKED:	Jerry Chen
APPROVAL:	Mike Wu

GENERAL TOLERANCE:	.X=±0.40 .XX=±0.30
UNIT:	MM
SCALE:	1:1
SHEET:	1 / 2
PROJECTION:	

	Neltron Industrial Co., Ltd.
DESCRIPTION:	4.2mm Power Wafer Double Rows R/A With Peg Type
PART NO:	2269R-XX-PG-01-V0F4A

SIZE	A4
------	-----------


1

2


3

4


5

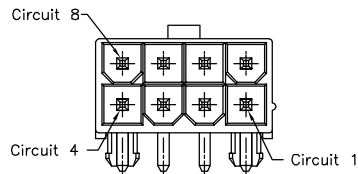


8PIN

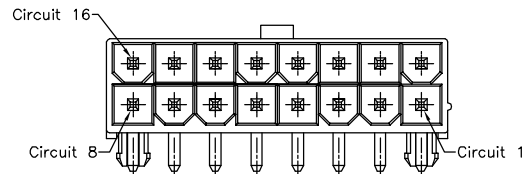


16PIN

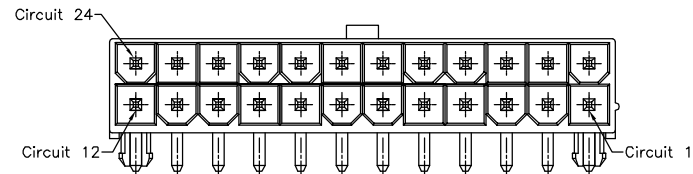


24PIN




6PIN

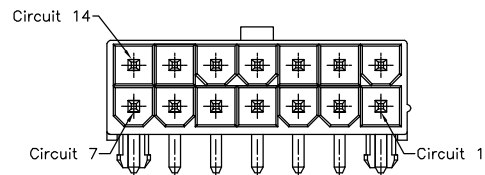


14PIN

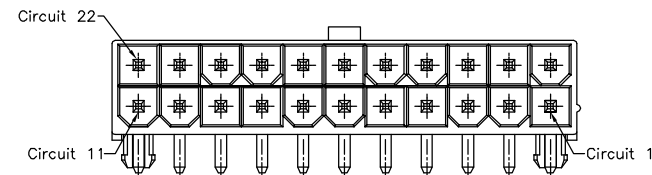


22PIN




4PIN

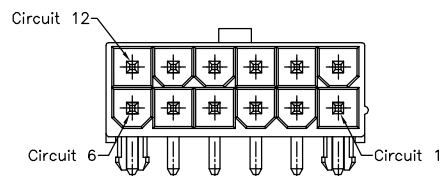


12PIN

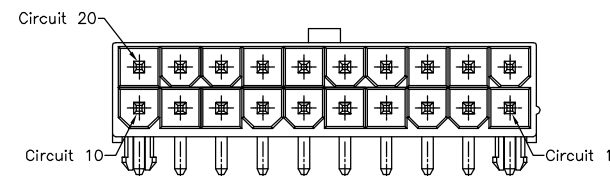


20PIN



2PIN

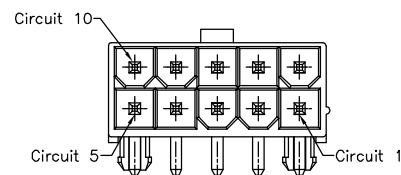

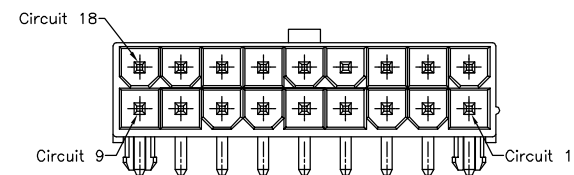



10PIN



18PIN

2~24P Protection Key Drawing(Ref.)

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	SIZE
E				Jamie Wang	.X=±0.40 .XX=±0.30 		
D				CHECKED:	UNIT: MM	DESCRIPTION:	
C	15-MAR-2021	Update 	MEI	Jerry Chen	SCALE:1:1	4.2mm Power Wafer Protection key Drawing	
B	29-Jun-2020	ECO-TW200004	Romina Wu	APPROVAL:	SHEET: 2 / 2	PART NO:	
A	28-Jul-2016		Jamie Wang	Mike Wu	PROJECTION: 	2269R-XX-PG-01-V0F4A	
REV	DATE	FILE	BY				