

未注公差/General tolerances(mm)



0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		D 0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~		/
3	6	10	18	30	50	80	120	180	250	315	400	500		±2°

±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50

间距/Pitch(mm)/线数范围/Poles 3.5/N=136P

使用温度范围/Operating temperature(°C) -40~+110

符合 RoHS 环保要求/Conform to RoHS Yes

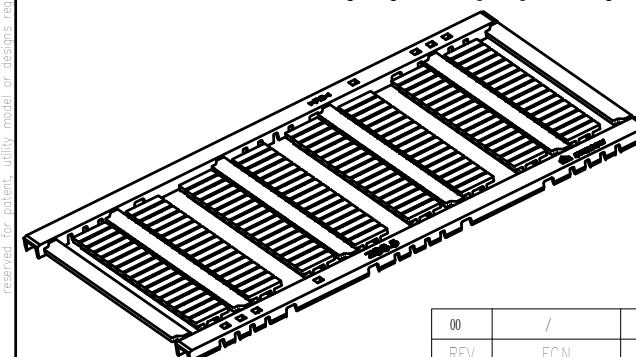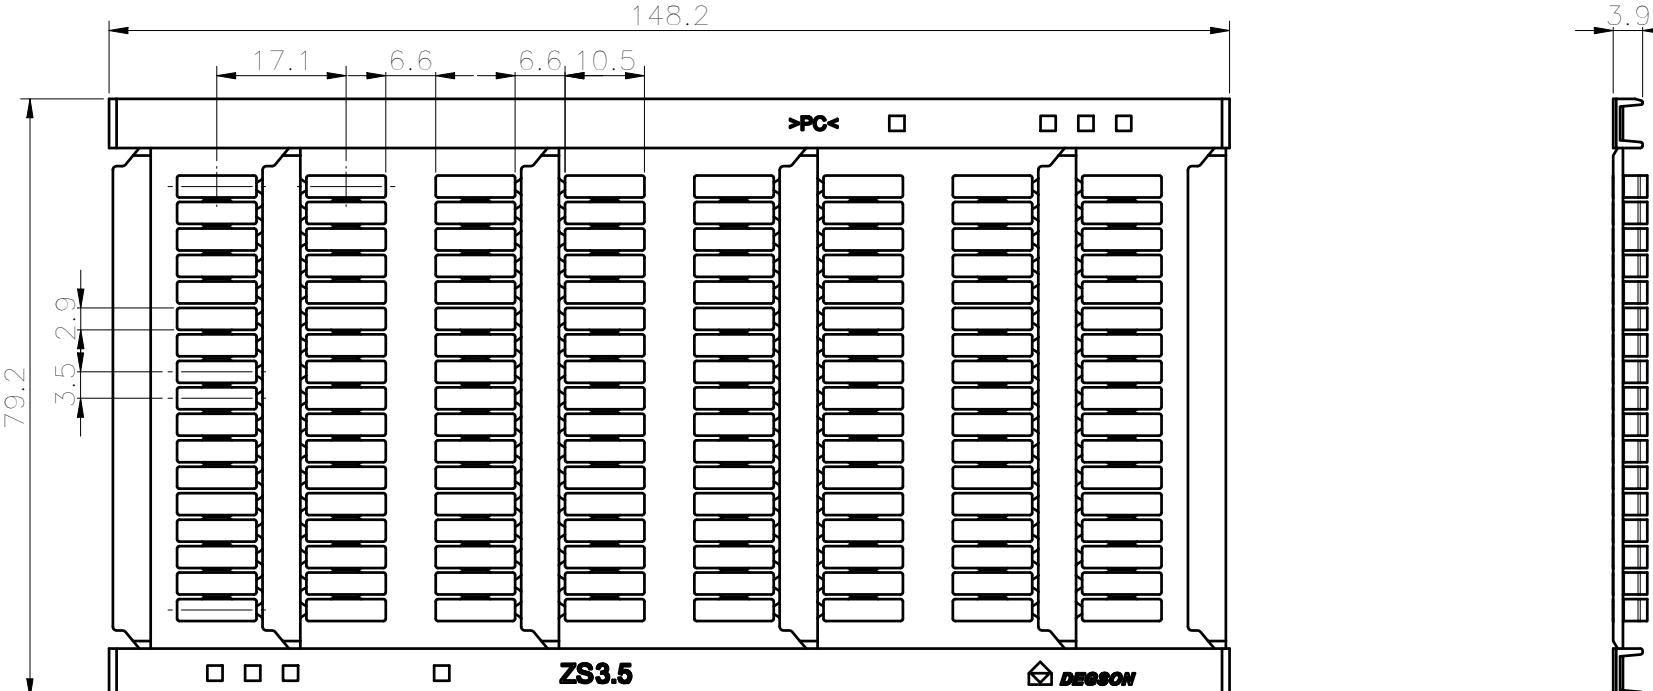

00	/	/	Chen KZ	2022.06.08
REV	ECN	DESCRIPTION	DRFT	DATE



MATERIAL: PC	SURFACE: /
MAT. NO./REV: /	MAT. STATUS: /
APPD: Peng M 2022.06.08	NAME
CHKD: Gao WG 2022.06.08	ZS3.5-136P-1Y-00A(H)
DRFT: Chen KZ 2022.06.08	DRAWING NO. /
	TYPE CUSTOMER DRAWING /
	DRAWING STATUS /
	SCALE 1:1
	HEET 1/1

active