


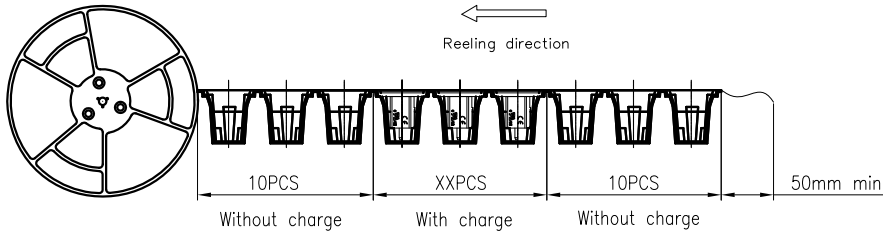
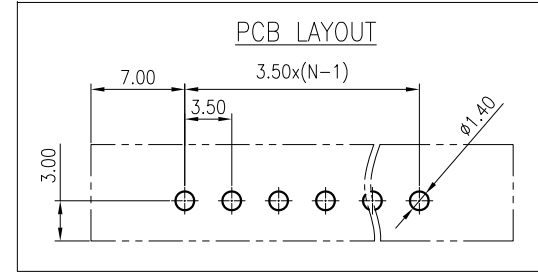

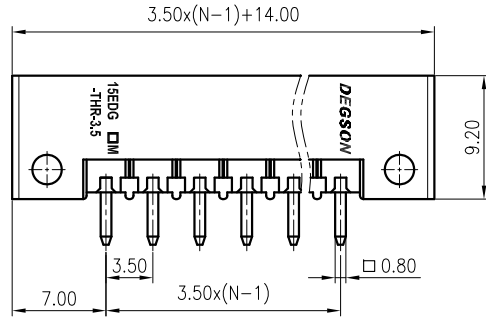

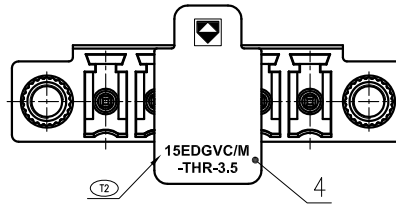
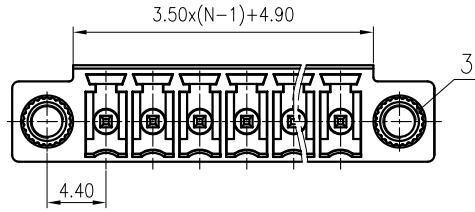


Scale 2.5:1

公差/General tolerances(mm)											D		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													0.1/10
													±2'



Pole	Width /W	Pitch /P	Width/F	Width/BO	Qty. per reel	Reel qty. per carton	Qty. per carton
2P	32mm	16mm	14.25mm	18.11mm	200	8	1600
3~9P	56mm	20mm	26.25mm	40.97mm	200	5	1000
10~12P	72mm	16mm	34.25mm	59.47mm	180	3	540

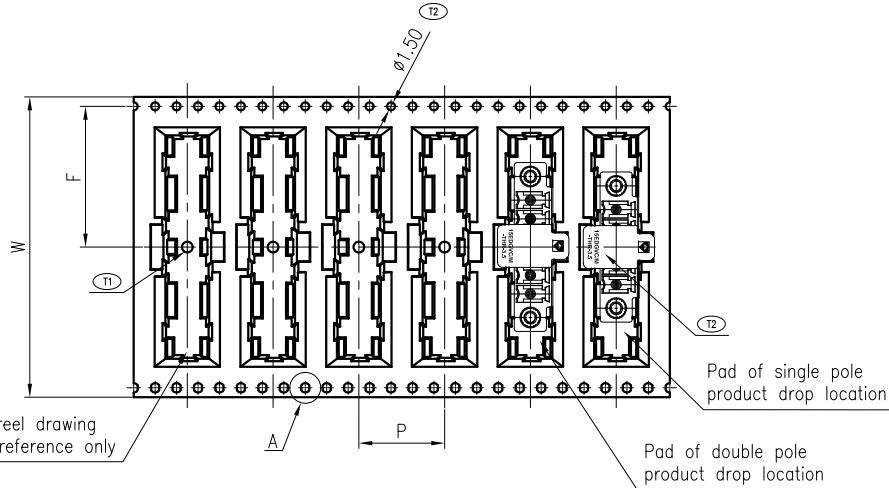

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cap	Thermoplastic	UL94V-0
3	Screw cap	Copper alloy	M2.5
2	Pin	Copper	Sn Plated
1	Housing	Thermoplastic	UL94V-0

UL 标准/UL Standard:	B
额定电压/电流/Rated Voltage(V)/Current(A)	300/8
EC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/8
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5
间距/Pitch(mm)/线数范围/Poles	3.50/N=02~12P
使用温度范围/Operating temperature(°C)	-40~+130
符合RoHS环保要求/Conform to RoHS	Yes

MATERIAL:	SURFACE: /
MAT NO.:	宁波高松电子有限公司
STATUS:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD: Lan ChH 2020.05.26	NAME: 15EDGVM-THR-3.5-XXP-1Y-00A(H)
CHKD: /	DRAWING NO.: 15EDGVM-THR-3.5-C02
DRFT: WL 2015.11.19	REV T3
SIZE: A3	SCALE: 1:1
TYPE: CUSTOMER DRAWING	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
T3		Change the drawing and tolerance table	Yu JZh	2020.05.26
T2	17-0159	Add engrave	LY	2019.05.29
T1	17-0015	Design Change	CMZ	2017.02.09