





REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	04/27/06
△		增加VDE、CE标志	LJH	11/12/07
△		修改焊脚厚度尺寸	LJH	05/17/08

- Notes:
- Pitch: 3.5mm, Poles: 2-24P
 - Rated voltage/current: UL 150V/10A
VDE 130V/10A
 - Operation temperatures: -40°C ~ +105°C
 - Withstanding Voltage: AC2000V/1Min
 - Insulation Resistance: 5000MΩ/DC1000V
 - Wire Range: 26~16AWG, 1.0mm²
 - Max. Torque Value: M2, 2.04kgf.cm
 - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over			
6	6	10	10	30	30	150	∩	
10	10	24	30	60	60	150	□	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

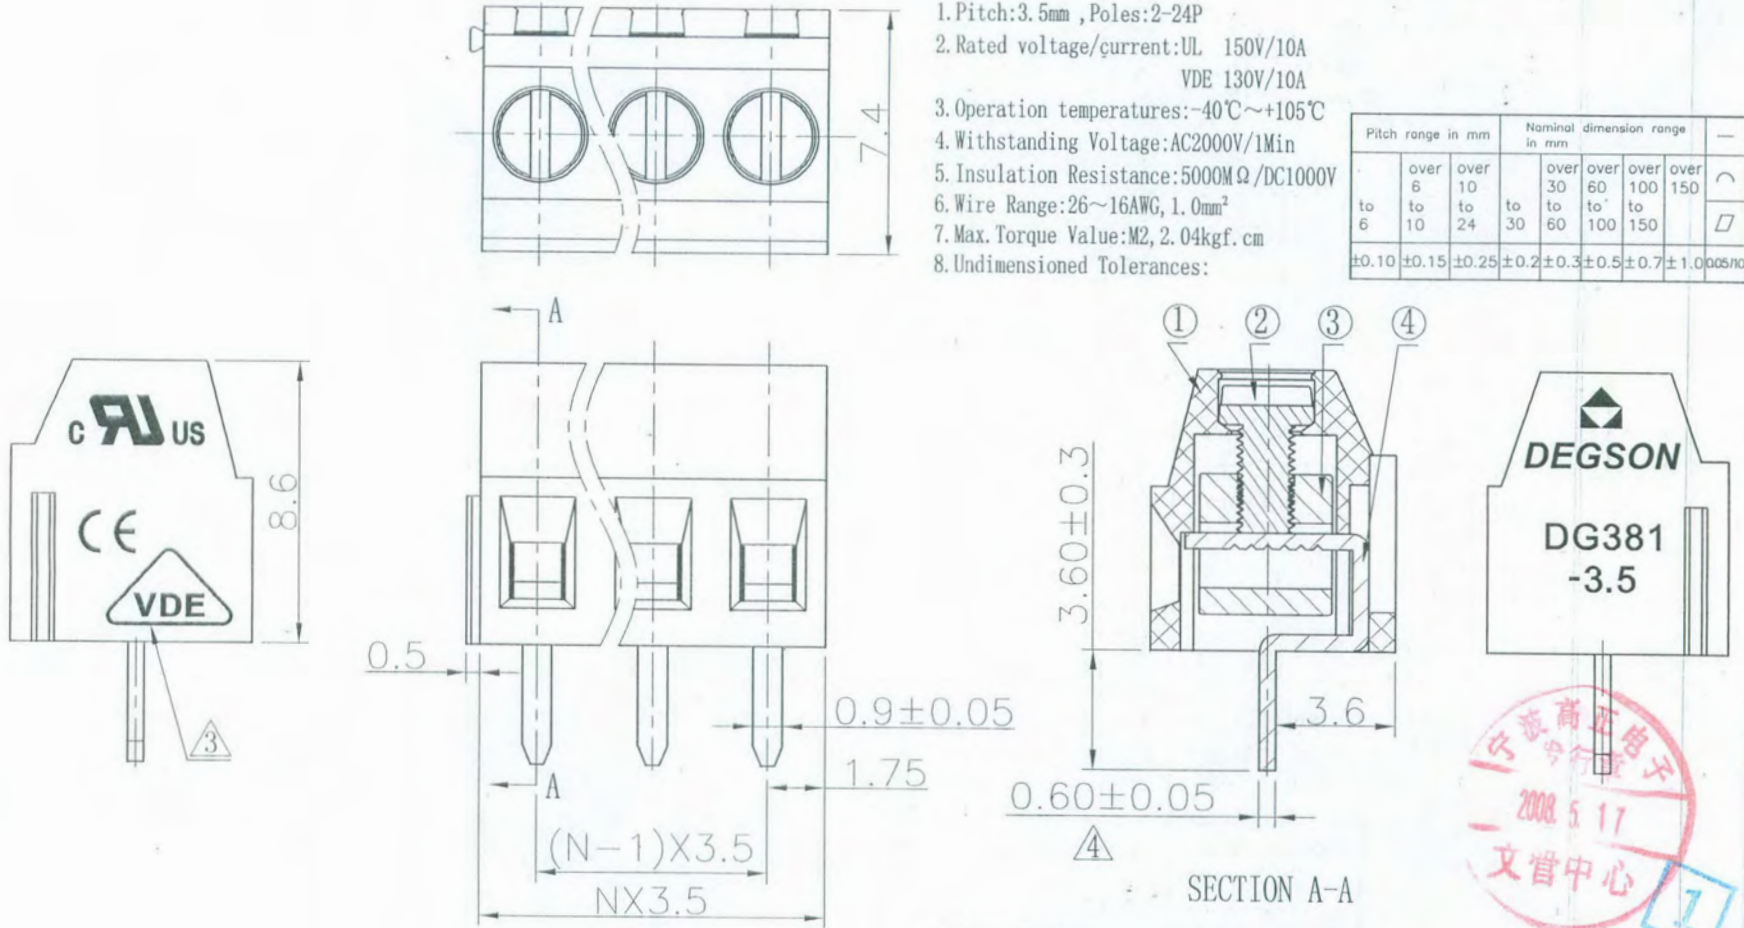

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG381-3.5-Housing	4032A0YXXA(H)	1	PA66	UL94V-0
2	DG381 Screws	S000001440(H)		Steel	Cr ³⁺ Zn
3	DG381 Cage	X000000300(H)		Brass	Ni plated
4	DG381 Pin header	4047B00010(H)		Phosphor bronze	SnCe

DETAILED LISTS	MM (INCH)	DFTO Haoyh	DATE 05/16/05	NAME	DEGSON®	宁波高正电子有限公司
TOLERANCES EXCEPT AS NOTED	MM	CHKD Haoyh	DATE 05/17/08	NAME	DEGSON®	DEGSON ELECTRONICS CO., LTD
	MM	MFO	DATE	NAME	DG381-3.5-XXP-1Y-00A(H)	
	±	APPVA hyl	DATE 05/17/08	FINISH:	DRAWING NO. DG381-3.5-E02	SIZE A3
	±			SCALE:	/PART NO.	REV T4
	±			THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	06/17/08
					SHEET 1	OF 1