

Specifications:

Current Rating:9.0A AC/DC  
 Voltage Rating:600V AC/DC  
 Contact Resistance:10m ohm. Max.  
 Insulation Resistance:1000M ohm. Min.  
 Withstanding Voltage:1500V AC For One Minute  
 Operating Temperature Range:-40°C To +105°C

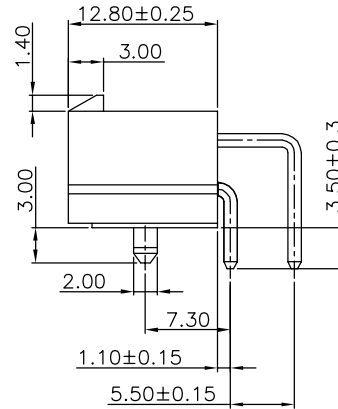
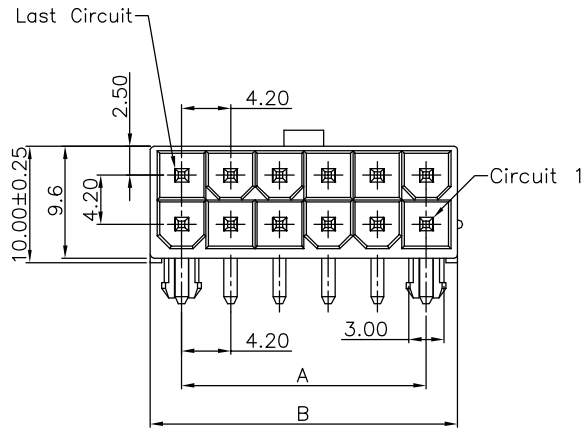
Materials:

Insulator:Nylon66 (UL94V-0)   
 Insulator Color:White  
 Contact:Copper Alloy  
 Plating:Tin Plated

How To Order




2269R-XX-PG-01-V0F4A

V0:V0 Material  
 Without Flange  
 PG:With Peg  
 No. Of Contact  
 R:Right Angle Type



Dimension Information:

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	—	5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

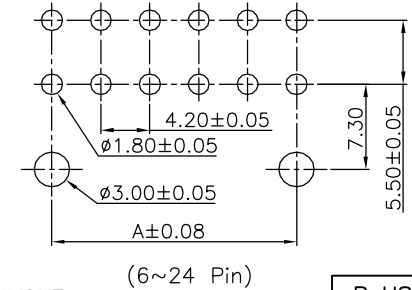

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C	15-MAR-2021	Update	MEI
B	29-Jun-2020	ECO-TW200004	Romina Wu
A	28-Jul-2016		Jamie Wang

DRAWN: Jamie Wang
CHECKED: Jerry Chen
APPROVAL: Mike Wu

GENERAL TOLERANCE: .X=±0.40 .XX=±0.30
UNIT: MM
SCALE: 1:1
SHEET: 1 / 2
PROJECTION:

<b>Neltron Industrial Co., Ltd.</b>
DESCRIPTION: 4.2mm Power Wafer Double Rows R/A With Peg Type
PART NO: 2269R-XX-PG-01-V0F4A

SIZE <b>A4</b>
-------------------

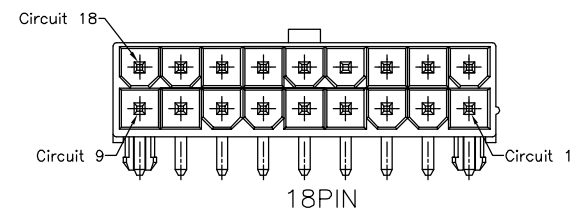
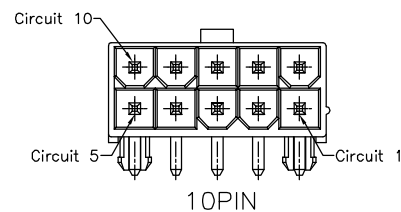

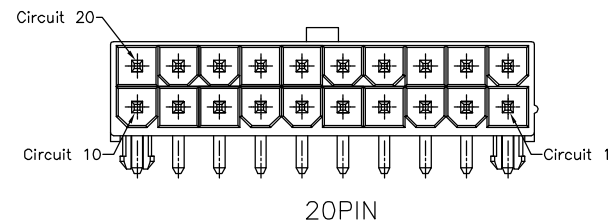
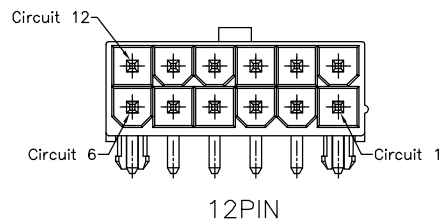

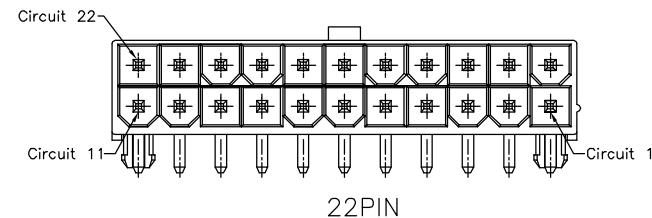
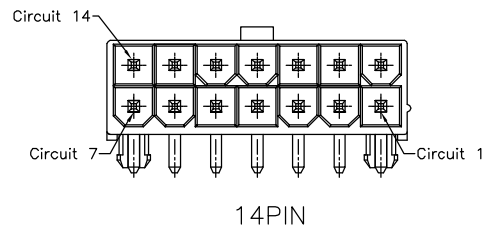

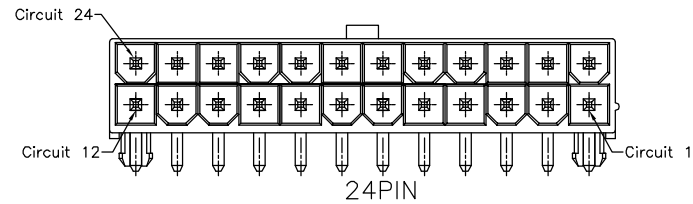
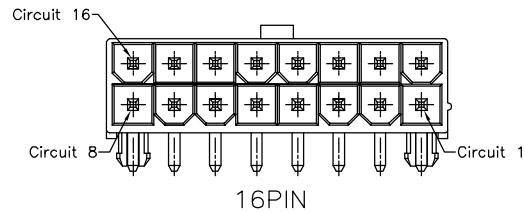
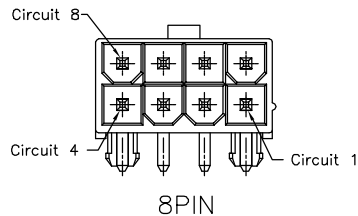
1

2

3





4

5



2~24P Protection Key Drawing(Ref.)

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 <b>Neltron Industrial Co., Ltd.</b>	SIZE
E				Jamie Wang	.X=±0.40 .XX=±0.30 		
D				CHECKED:	UNIT: MM	DESCRIPTION:	A4
C	15-MAR-2021	Update 	MEI	Jerry Chen	SCALE:1:1		
B	29-Jun-2020	ECO-TW200004	Romina Wu	APPROVAL:	SHEET: 2 / 2	PART NO:	D
A	28-Jul-2016		Jamie Wang	Mike Wu	PROJECTION: 		
REV	DATE	FILE	BY				