


Specifications:
 Current Rating: 2.0A AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40°C ~ +105°C

Material:
 Insulator: Thermoplastic (UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy
 Plated: Gold/Matte Tin/Selective Gold Plated

How To Order
 2210S-XXX

G:Gold Plated
 MT:Matte Tin Plated
 SG:Gold Plated On Contact Area,
 Matte Tin Plated On Solder Tail.
 No. of Contacts
 Straight Type

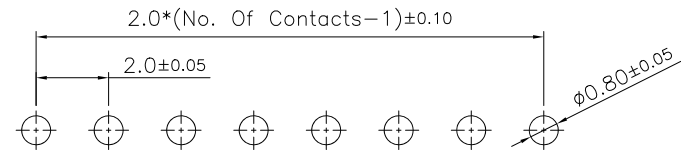

P.C.B Layout

RoHS Compliant

F				DRAWN: Yizhen Lee	GENERAL TOLERANCE: .X=±0.30 .XX=±0.20	Neltron Industrial Co., Ltd.	DESCRIPTION: 2.0mm Pin Header Straight Type	SIZE A4
E								
D				CHECKED: Jerry Chen	UNIT: MM	PART NO: 2210S-XXX		
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1			
A	06-MAY-2024		Yizhen		PROJECTION:			
REV	DATE	FILE	BY					