

Specifications:

- Current rating: 1.0~7.0Amps
- Voltage rating: 250V AC, DC
- Contact resistance: 10mohm Max
- Insulation resistance: 1,000Mohm min.
- Withstanding voltage: 1,500V AC; DC
- Operating Temperature range: -25°C ~ +105°C


Materials:

- Insulator: High Temp. Plastic (LCP UL94V-0)
- Contact: Copper Alloy
- Plating: Tin Plated

How To Order
5561SA-XX-01

Without Post With Board Lock $\triangle B$
No. Of Positions
SA: Single row & Straight Type

Positions	Dimension			Positions	Dimension		
	A	B	C		A	B	C
2	9.65	3.00	7.30	8	27.65	21.00	25.30
3	12.65	6.00	10.30	9	30.65	24.00	28.30
4	15.65	9.00	13.30	10	33.65	27.00	31.30
5	18.65	12.00	16.30	11	36.65	30.00	34.30
6	21.65	15.00	19.30	12	39.65	33.00	37.30
7	24.65	18.00	22.30				

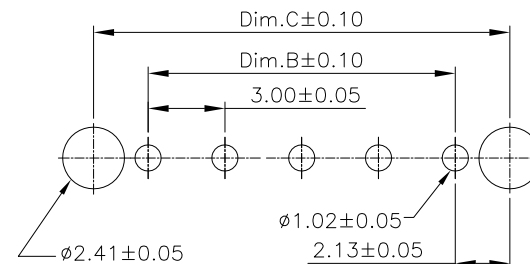

PCB LAYOUT

RoHS Compliant



				DRAWN: Blake Huang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	Neltron Industrial Co., Ltd.	
				CHECKED: Jerry Chen	UNIT: MM		DESCRIPTION: 3.0mm Wafer Single Row Straight Type
C	13-MAY-2020	ECO-TW200003	Jamie Wang	APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 5561SA-XX-01	A4
B	14-MAR-2017	加註標示	Jamie Wang		SHEET: 1 / 2		
A	19-May-2016		Blake Huang		PROJECTION:		
REV	DATE	FILE	BY				


1

2


3

4

5




8P

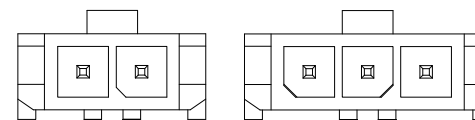


2P


3P




9P




4P

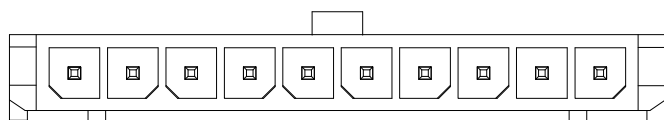


10P




5P

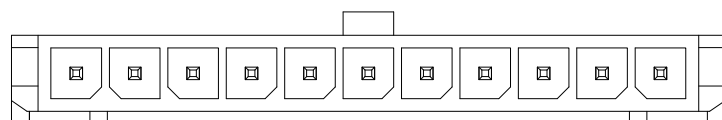


11P

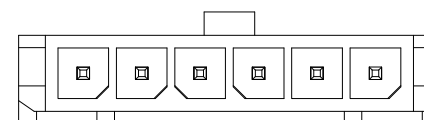

6P





12P



7P

此為防呆

5561SA-XX-01 (2-12)Pin防呆位置分部示意圖

				DRAWN: Blake Huang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	
				CHECKED: Jerry Chen	UNIT: MM SCALE: 1:1		DESCRIPTION: 3.0mm Wafer Single Row Straight Type
C	13-MAY-2020	ECO-TW200003	Jamie Wang	APPROVAL: Mike Wu	SHEET: 2/2	PART NO: 5561SA-XX-01	A4
B	14-MAR-2017	加註標示	Jamie Wang		PROJECTION: 		
A	19-May-2016		Blake Huang				
REV	DATE	FILE	BY				