

1

2

3

4

5



Specifications:

Current Rating:3.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm. Max.
Insulation Resistance:1,000M ohm. Min.
Withstanding Voltage:500V AC For One Minute
Operating Temperature Range:-40°C To +105°C





Material and Finish

Insulator:Nylon 6T (UL94V-0)
Insulator Color:Black or White
Contact:Brass
Plated:Gold Plated/Tin Plated/Selective Gold Plated

How to Order


2211SM-XXX-BX-XX-CR

CR:Cap + Tape & Reel
BK:Black / Blank White
B1:B1 Type / B2:B2 Type
G:Gold flash / T:Tin Plated
SG:Selective gold plated
No of Positions
SMT Type

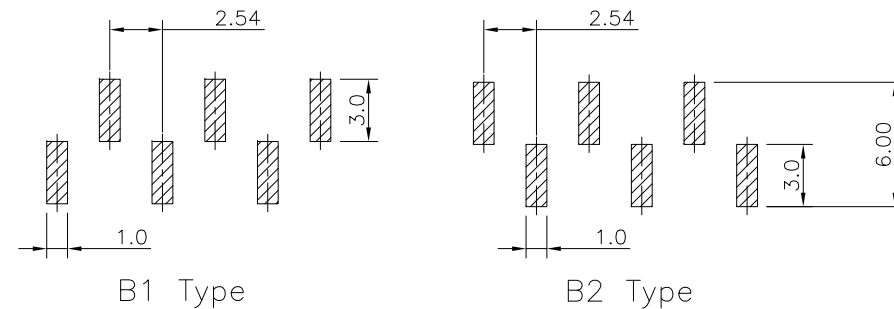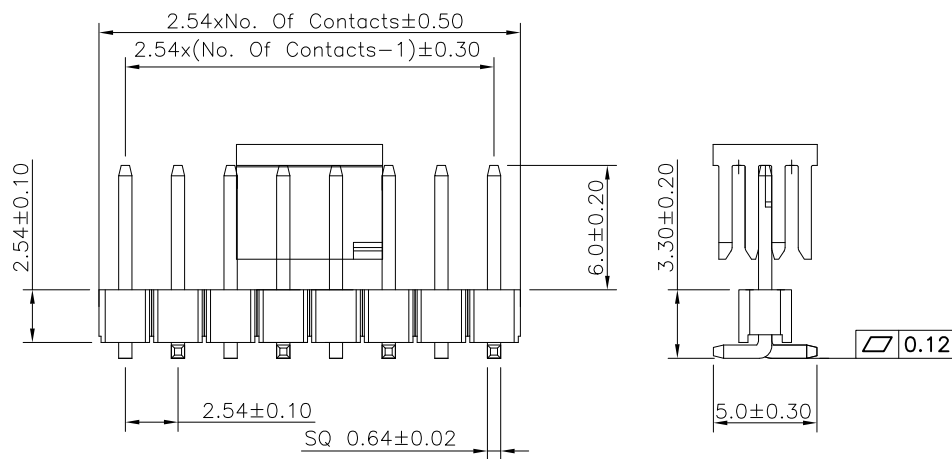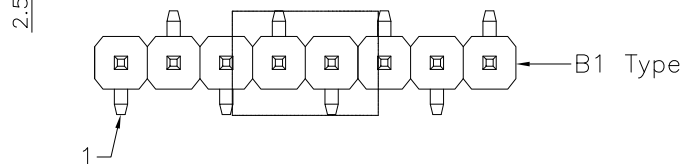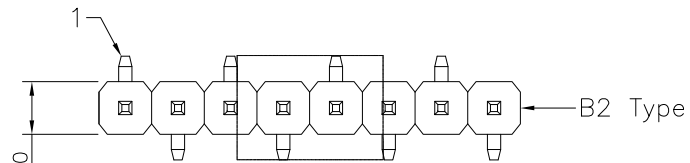

P.C.B layout

RoHS Compliant

F				DRAWN: JERRY	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.
E						
D				CHECKED:	UNIT: MM	DESCRIPTION: 2.54mm Pin Header SMD Type
C					SCALE: 1:1	
B				APPROVAL: JERRY	SHEET: 1/1	PART NO: 2211SM-XXX-BX-XX-CR
A	08-AUG-2018				RORY	
REV	DATE	FILE	BY			