

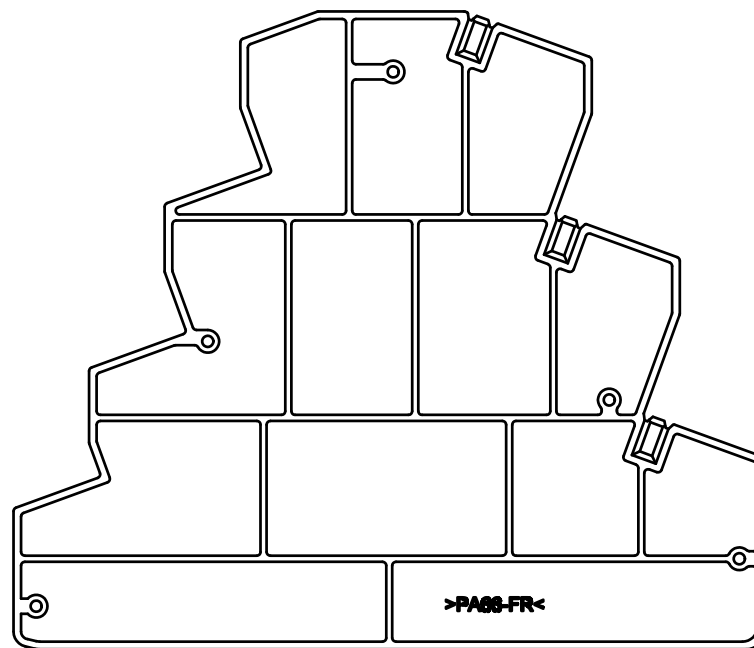

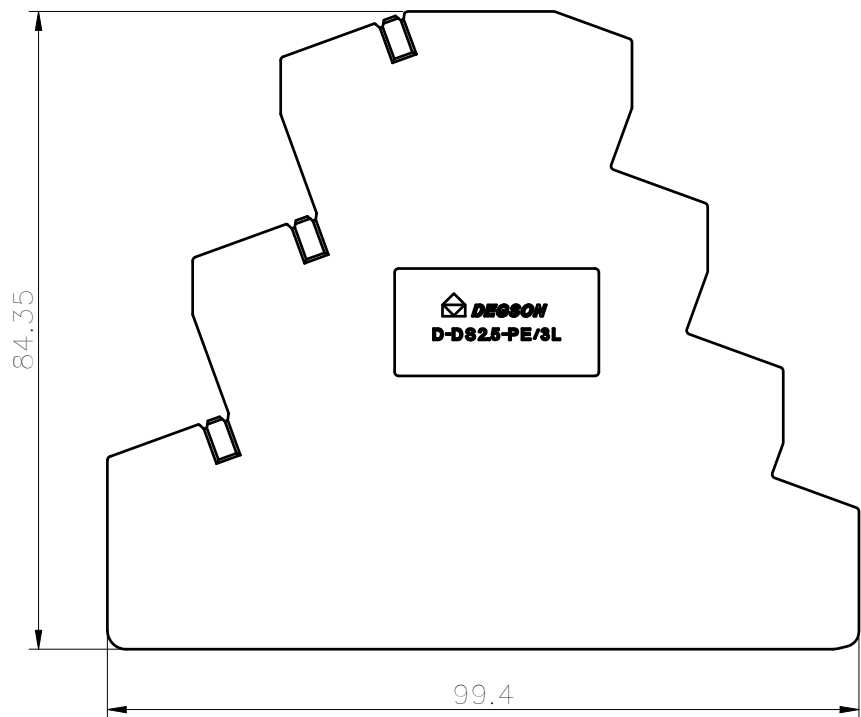


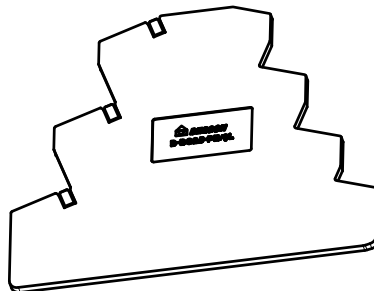

Please refer to the 3D model, for these unmarked dimensions.

未注公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

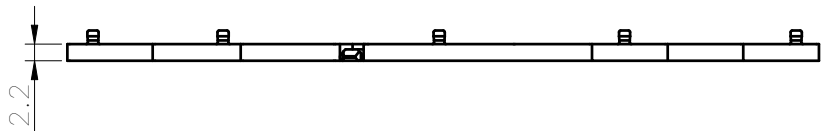

使用温度范围/Operating temperature(°C)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes
阻燃等级/Flame Class	UL94 V-0

		MATERIAL: PA66	SURFACE:	
APPD: 李根芳 2021.08.19		MAT NO./REV: 11060000316-1 / 00	MAT STATUS: 小批量	
CHKD: 马恩开 2021.08.19		NAME		
DRFT: 米帅 2021.08.18		D-DS2.5-PE/3L-01P-11-00A(H)		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200004813	CUSTOMER DRAWING	已发布	1:1	1/1

00		首版发行	米帅	2021.08.18
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless express authorization is granted. Degson will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经书面授权, 严禁禁止转让、复制、利用、交加本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。