


Positions	Dimension			Positions	Dimension		
	A	B	C		A	B	C
2	9.65	3.00	14.20	8	27.65	21.00	32.20
3	12.65	6.00	17.20	9	30.65	24.00	35.20
4	15.65	9.00	20.20	10	33.65	27.00	38.20
5	18.65	12.00	23.20	11	36.65	30.00	41.20
6	21.65	15.00	26.20	12	39.65	33.00	44.20
7	24.65	18.00	29.20				

Specifications:
 △ Current rating:1.0~7.0Amps
 Voltage rating:250V AC,DC
 Contact resistance:10mohm Max
 Insulation resistance:1,000Mohm min.
 Withstanding voltage:1,500V AC;DC
 Operating Temperature range:-25°C ~ +105°C

Materials:
 Insulator:High Temp.Plastic(LCP UL94V-0)
 Color:Black
 Terminal:Copper Alloy
 Plating:Gold or Tin Plated
 Packing:300Pcs/Reel

How to order
 5561SA-XXX-SM1-CR

Cap&Tape&Reel
 SMD Type
 G:Gold Plated
 T:Tin Plated
 No. of Contacts
 SA:Single row

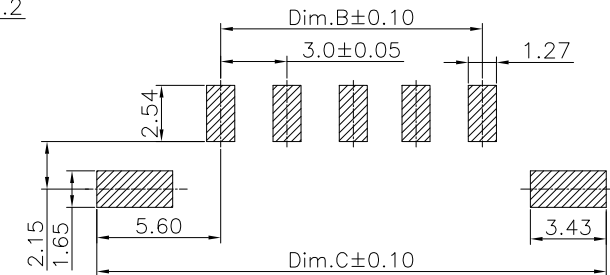

PCB Layout RoHS Compliant

				DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	Neltron Industrial Co., Ltd.	
				CHECKED: Jerry Chen	UNIT: MM		DESCRIPTION: 3.0mm Wafer Single Row SMD Type
B	13-MAY-2020	ECO-TW200003	Jamie Wang	APPROVAL: Mike Wu	SCALE:1:1	PART NO: 5561SA-XXX-SM1-CR	A4
A	23-JUN-2017		Jamie Wang		SHEET: 1 / 2		
REV	DATE	FILE	BY		PROJECTION:		


1

2


3

4


5

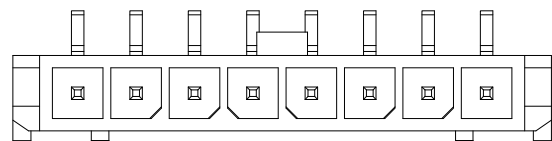


8P

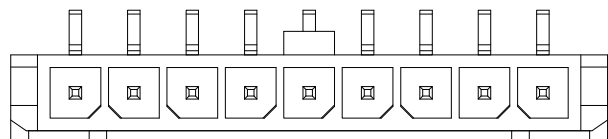


9P

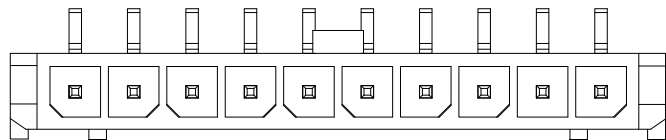


10P

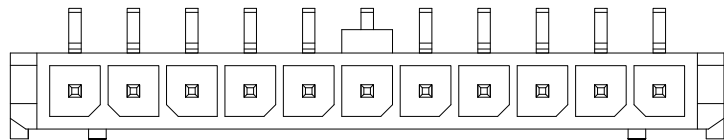


11P

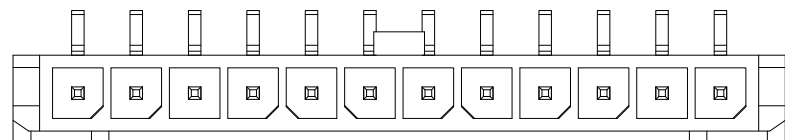


12P

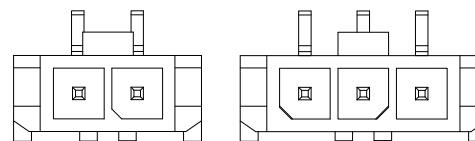


2P




3P




4P

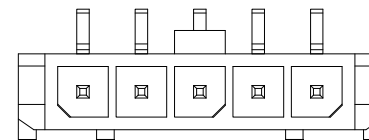

5P

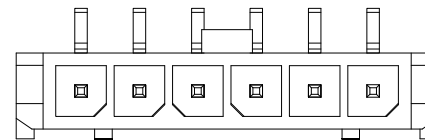

6P

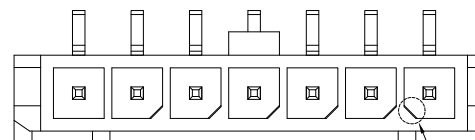


7P

此為防呆

5561SA-XXX-SM1 (2-12)Pin防呆位置分部示意圖

RoHS Compliant

				DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		
				CHECKED: Jerry Chen	UNIT: MM		DESCRIPTION: 3.0mm Wafer Single Row SMD Type	SIZE
B	13-MAY-2020	ECO-TW200003	Jamie Wang	APPROVAL: Mike Wu	SCALE: 1:1	PART NO:	A4	
A	23-JUN-2017		Jamie Wang		SHEET: 2/2	5561SA-XXX-SM1-CR		
REV	DATE	FILE	BY		PROJECTION: 