

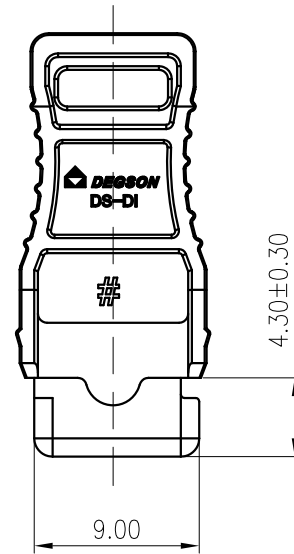
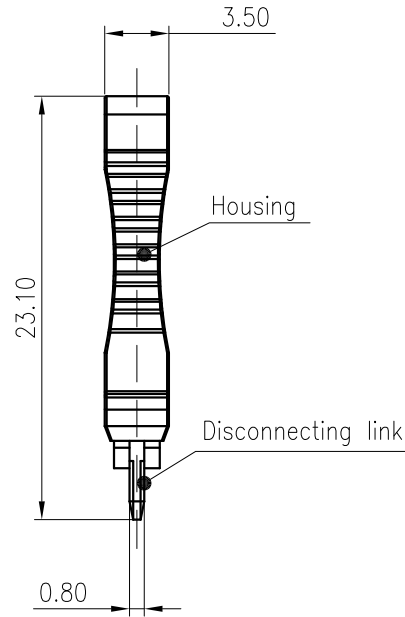
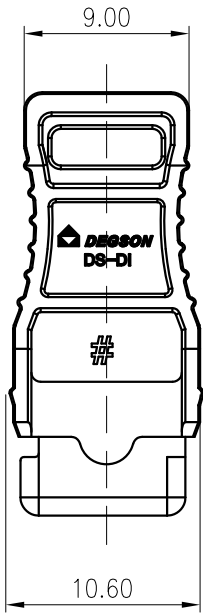


未注公差/General tolerances(mm)												0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.50
最大负载电流/Maximum load current(A)											20A	
使用温度范围/Operating temperature(°C)											-40~+105	
符合RoHS环保要求/Conform to RoHS											Yes	



Please refer to the 3D model, for these unmarked dimensions.

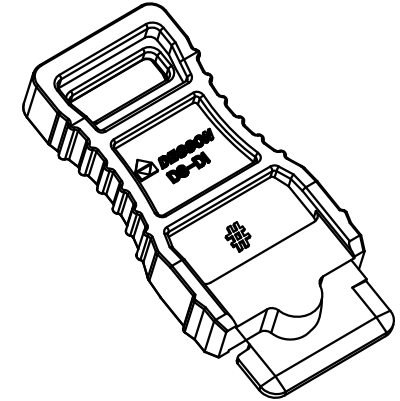

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权,否则禁止转让、复制、利用、交还本文件的内容。侵犯者将承担赔偿责任。未经许可,不得复制或传播本文件。本公司保留对涉及发明、实用新型和外观设计专利的所有权利。



REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	Li GL 2021.03.03	NAME: DS-DI-01P-15-00A(H)	
CHKD:		DRAWING NO.: 11000645	
DRFT:	Mao J 2021.03.03	REV	D0-1
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 2.5:1 SHEET 1/1