
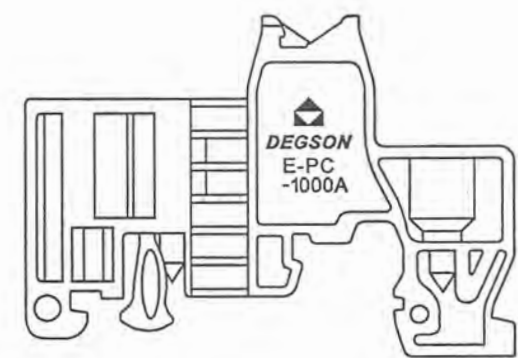
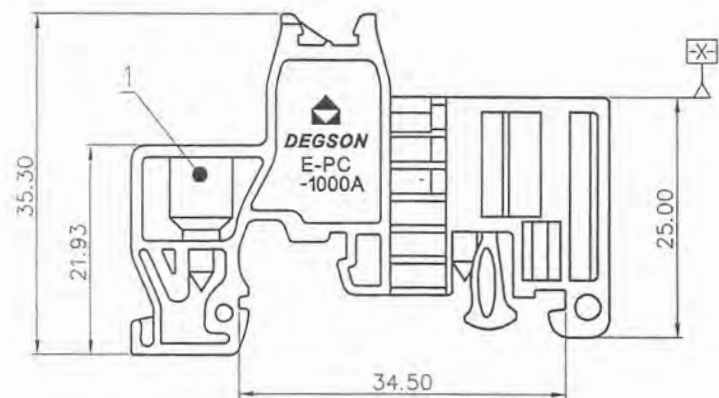


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

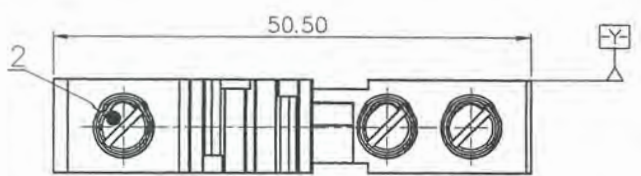

NOTES1:  
 UL Standard  
 1.Torque value : M3 , 4.43Lb.in.  
 IEC Standard  
 1.Torque value : M3 , 0.5N·m

NOTES2:  
 1.Dimension shall be interpreted per ASME Y14.5-2009  
 2.Operating temperature: -40°C~+105°C  
 3.Undimensioned tolerances:

Pitch Range In mm		Nominal Dimension Range In mm						±	∅
TO	Over TO	Over TO	Over TO	Over TO	Over TO	Over TO	0.1/10		
6	10	24	30	60	100	150	<		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2"	

4.RoHS Compliance

E - PC - 01P - 1Y - 1000A (H)  
 (Series No.) (Poles) (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)  
 (Single Pitch) 1000A-(Standard) (RoHS)



ITEM	NAME OF PART	MATERIAL	NOTES
2	Screw	Steel	M3/Zn plated
1	Housing	PA66	UL94V-0

DETACHED LISTS	PART NO.: 1	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: <i>Aaron 2018.11.9</i>	NAME: E-PC-01P-1Y-1000A(H)		
	CHKD: <i>Denny 2018.11.9</i>	TITLE: CUSTOMER DRAWING		
	DRFT: LJB 2018.11.08	REV TO		
THIRD ANGLE PROJECTION		DRAWING NO.: E-PC-C03	SHEET 1/1	
MM (INCH) DO NOT SCALE DRAWING		SCALE 1:1		