


Specifications:  
 Current rating: 2.0A AC, DC  
 Voltage rating: 100V AC, DC  
 Contact resistance: 20m ohm. Max  
 Insulation resistance: 800M ohm. Min  
 Withstanding voltage: 1000V AC/minute  
 Operating temperature range: -25°C ~ +85°C  
 Material:  
 Insulator: Nylon66 UL94V-0  
 Default color: White  
 Contact: Brass  
 Plated: Tin Plated  
 How To Order:  
 2417SJ-XX

Number of Circuits  
 SJ: Straight

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.00	6.10	10	18.00	22.10
03	4.00	8.10	11	20.00	24.10
04	6.00	10.10	12	22.00	26.10
05	8.00	12.10	13	24.00	28.10
06	10.00	14.10	14	26.00	30.10
07	12.00	16.10	15	28.00	32.10
08	14.00	18.10	16	30.00	34.10
09	16.00	20.10			

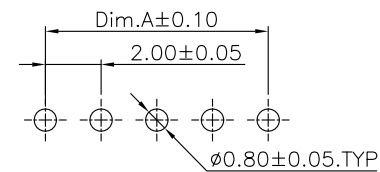

PCB LAYOUT

RoHS Compliant

				DRAWN: Jerry Chen	GENERAL TOLERANCE: .X = ±0.2 .XX = ±0.15	<b>Neltron Industrial Co., Ltd.</b>	
				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: 2.00mm Wire to Board Wafer Straight Type
B	07-Jul-2014	ECN-TW1407002	Cherry Wu	APPROVAL: Mike Wu	SCALE: 1:1	PART NO:	<b>A4</b>
A	16-May-2006		Jerry Chen		SHEET: 1 / 1	2417SJ-XX	
REV	DATE	FILE	BY		PROJECTION:		