


Specifications:
 Current Rating:2.0A AC,DC
 Voltage Rating:125V AC,DC
 Contact Resistance:20m ohm.Max
 Insulation Resistance:1000M ohm.Min
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-40°C~+85°C

Material and Finish:
 Insulator:Nylon 46 (UL94V-0)
 Insulator Color:White
 Contact:Brass
 Plated:Matte Tin Plated

How To Order
 2417SJ-XX-SM1-02
 Without post
 SMD Type
 No. of Contacts
 Straight

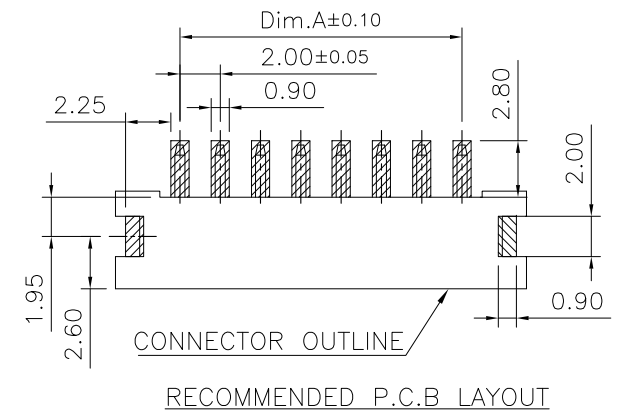

Dimension Information:

Contacts	DimA	DimB	DimC	Contacts	DimA	DimB	DimC
2	2.00	8.40	3.70	9	16.00	22.40	17.70
3	4.00	10.40	5.70	10	18.00	24.40	19.70
4	6.00	12.40	7.70	11	20.00	26.40	21.70
5	8.00	14.40	9.70	12	22.00	28.40	23.70
6	10.00	16.40	11.70	13	24.00	30.40	25.70
7	12.00	18.40	13.70	14	26.00	32.40	27.70
8	14.00	20.40	15.70	15	28.00	34.40	29.70

RoHS Compliant

F				DRAWN: LISY	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	Neltron Industrial Co., Ltd.	DESCRIPTION: 2.0mm Wafer Straight SMD Type	SIZE
E								
D				CHECKED: JERRY	UNIT: MM	PART NO: 2417SJ-XX-SM1-02	A4	
C					SCALE: 1:1			
B				APPROVAL: RORY	SHEET: 1/1			
A	25-JAN-2022		LISY		PROJECTION:			
REV	DATE	FILE	BY					