


Dimension:

Contacts	DimA	DimB	DimC	Contacts	DimA	DimB	DimC
02	2.00	8.00	4.75	07	12.00	18.00	14.75
03	4.00	10.00	6.75	08	14.00	20.00	16.75
04	6.00	12.00	8.75	09	16.00	22.00	18.75
05	8.00	14.00	10.75	10	18.00	24.00	20.75
06	10.00	16.00	12.75				



Specifications:

Current Rating:2.0A AC,DC
 Voltage Rating:125V AC,DC
 Contact Resistance:20m ohm.Max
 Insulation Resistance:1000M ohm.Min
 Withstanding Voltage:500V AC/Minute
 Operating Temperature range:-40°C~+85°C




Material and Finish:

Insulator:Nylon 46 (UL94V-0)
 Insulator Color:White
 Contact:Brass
 Plated:Tin Plated
 Package:500pcs/Reel

How To Order

2417RJ-XX-SM2-02-XX \triangle

TR:Tape&Reel
 Blank Tube \triangle \triangle
 Without Post&With Metal Tab
 SMD Type
 No. of Contacts
 RJ:Right Angle

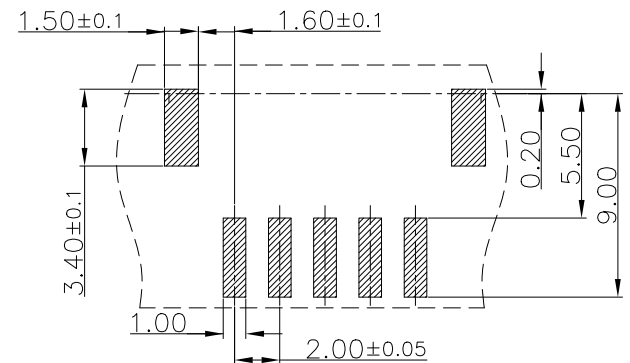

PCB Layout

RoHS Compliant

REV	DATE	FILE	BY
D	20-Mar-2024	\triangle	Lucy Du
C	19-Feb-2020	\triangle	Romina Wu
B	05-Oct-2019	Add "Tube" Packing	Jamie Wang
A	26-Aug-2019		Jamie Wang

DRAWN:	Jamie Wang
CHECKED:	Jerry Chen
APPROVAL:	Rory Chen

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1 / 1
PROJECTION:	

Neltron Industrial Co., Ltd.	
DESCRIPTION:	2.0mm Wire To Board Wafer R/A SMD Type
PART NO:	2417RJ-XX-SM2-02-XX \triangle \triangle

SIZE	A4
------	-----------