


Specifications:

Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1500V AC For One Minute
 Operating Temperature Range:-40°C To +105°C



Materials:

Insulator:Thermoplastic (UL94V-0/UL94V-2)
 Insulator Color:White & Ivory & Transparent & Black △
 Terminal:Copper Alloy
 Plating:Tin Plated


How To Order

2269R-XX-XX-XX-XX △
 △

- Blank Standard △
- HF:Halogen-Free(White)
- F4A:SC21(Ivory)
- Blank V2 Material(Transparent) △
- V0:V0 Material
- Blank Standard △
- BK:Black
- No. Of Contacts
- R:Rigit Angle Type

Dimension Information:

Circuits	Dim.A	Dim.B	Dim.C	Dim.D	Circuits	Dim.A	Dim.B	Dim.C	Dim.D
2	—	5.4	9.0	15.4	14	25.2	30.6	34.2	40.6
4	4.2	9.6	13.2	19.6	16	29.4	34.8	38.4	44.8
6	8.4	13.8	17.4	23.8	18	33.6	39.0	42.6	49.0
8	12.6	18.0	21.6	28.0	20	37.8	43.2	46.8	53.2
10	16.8	22.2	25.8	32.2	22	42.0	47.4	51.0	57.4
12	21.0	26.4	30.0	36.4	24	46.2	51.6	55.2	61.6

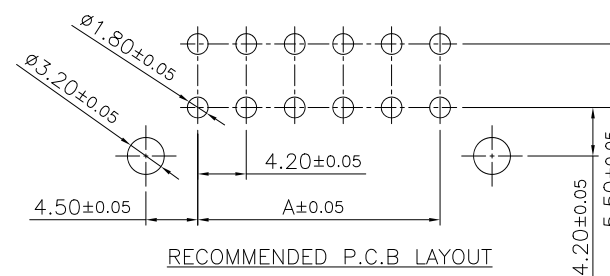

RoHS Compliant

				DRAWN: Lucy Du	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	Neltron Industrial Co., Ltd.	
				CHECKED: Jerry Chen	UNIT: MM		DESCRIPTION: 4.2mm Power Wafer Protection
C	26-DEC-2023	△	Lucy Du	APPROVAL: Rory Chen	SCALE: 1:1	PART NO: 2269R-XX-XX-XX-XX △ △	A4
B	24-OCT-2023	△	Jamie Chuang		SHEET: 1 / 2		
A	23-SEP-2022		Lucy Du		PROJECTION:		
REV	DATE	FILE	BY				













1

2

3

4

5

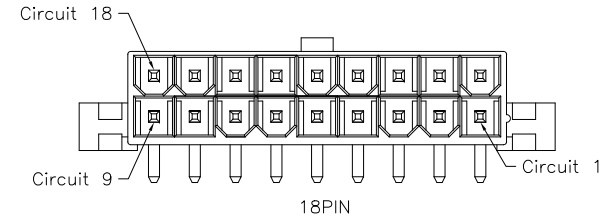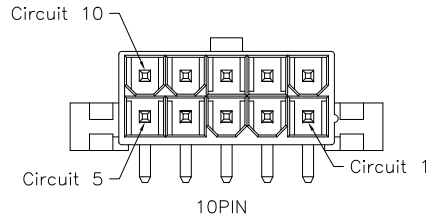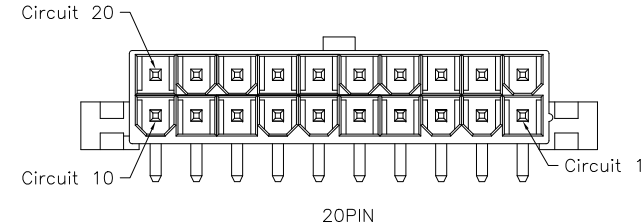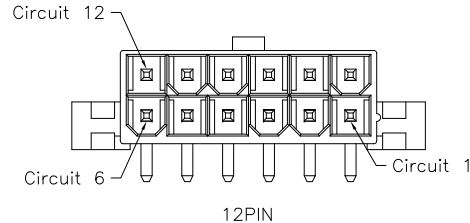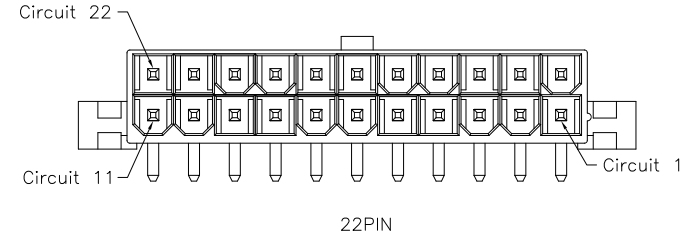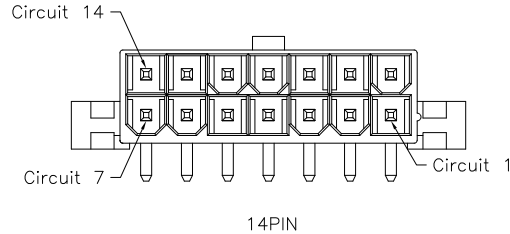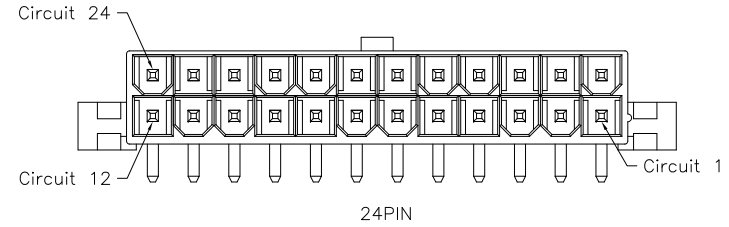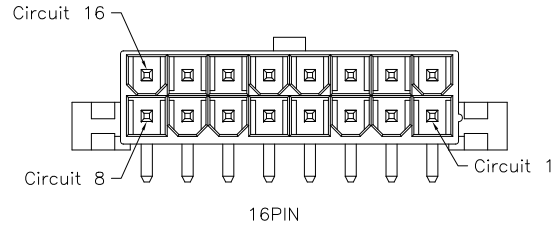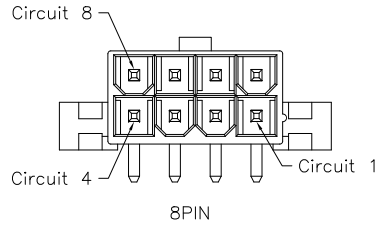

2~24P Protection Key Drawing(Ref.)

RoHS Compliant

				DRAWN: Lucy Du	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	Neltron Industrial Co., Ltd.	
				CHECKED: Jerry Chen	UNIT: MM		DESCRIPTION: 4.2mm Power Wafer Protection
C	26-DEC-2023		Lucy Du	APPROVAL: Rory Chen	SCALE: 1:1	PART NO: 2269R-XX-XX-XX-XX	A4
B	24-OCT-2023		Jamie Chuang		SHEET: 2 / 2		
A	23-SEP-2022		Lucy Du		PROJECTION:		
REV	DATE	FILE	BY				