



1

2

3



4

5

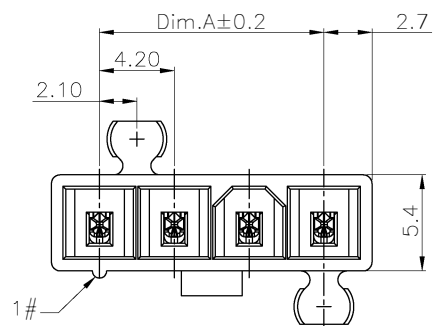



Specifications:
 Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1500V AC For One Minute
 Operating Temperature Range:-40°C To +105°C

Materials:
 Insulator:Nylon 66 UL94V-0 or UL94V-2
 Insulator Color:Transparent or White
 Terminal:Brass
 Plating:Tin Plated

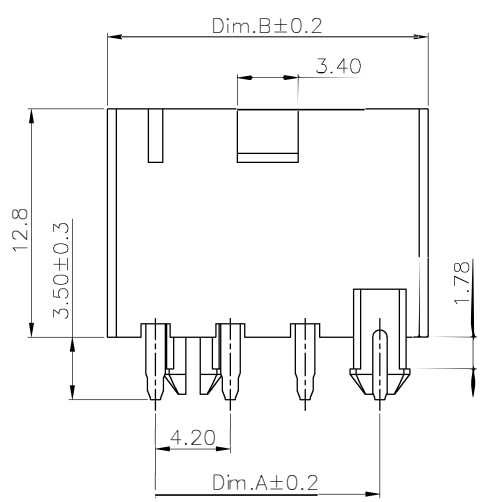

How To Order:
 2266SA-XX-PG-XX


- VO:UL94V-0
- Blakb V2:UL94V-2(Standard)
- PG:With post
- No of Contacts
- Single Row
- Straight Type

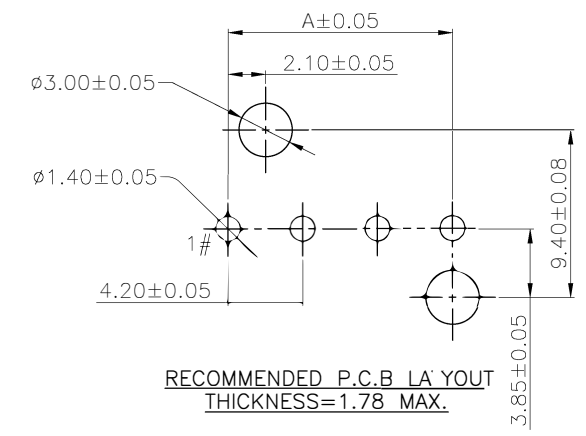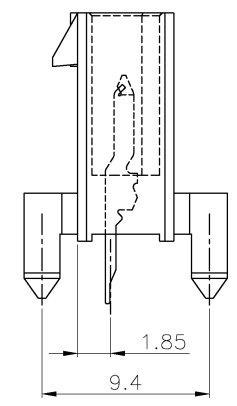

RECOMMENDED P.C.B LAYOUT
 THICKNESS=1.78 MAX.

Dimension Information:

Pos.	Dim.A	Dim.B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20

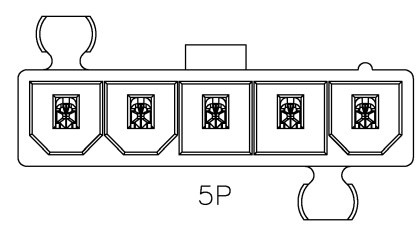

RoHS Compliant

				DRAWN: Andrew	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	Neltron Industrial Co., Ltd.	
				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: 4.20mm Power Wafer Single Row Straight Type(With post)
C	29-JUN-2020	ECO-TW200004	Jamie Wang	APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 2266SA-XX-PG-XX	A4
B	27-Nov-2008	ECN-CN081144	Andrew		SHEET: 1 / 1		
A	02-Sep-2008		Andrew		PROJECTION:		
REV	DATE	FILE	BY				