
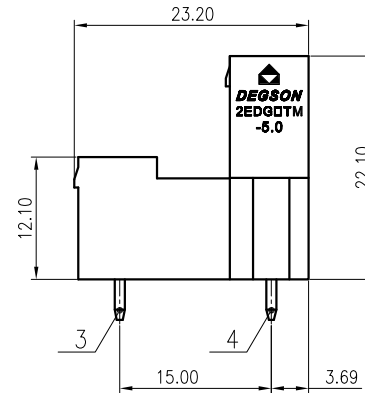
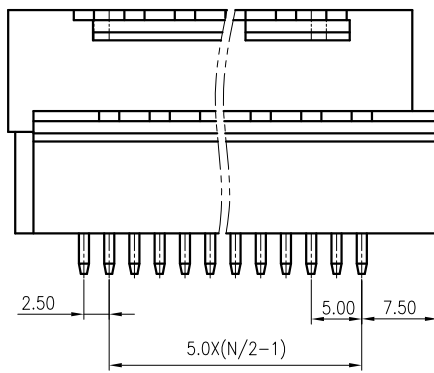
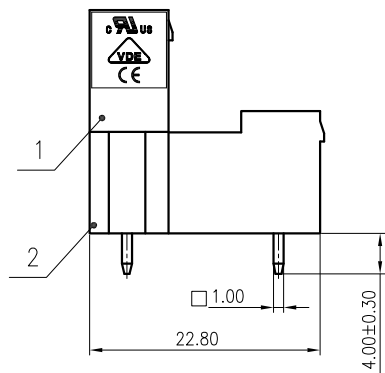
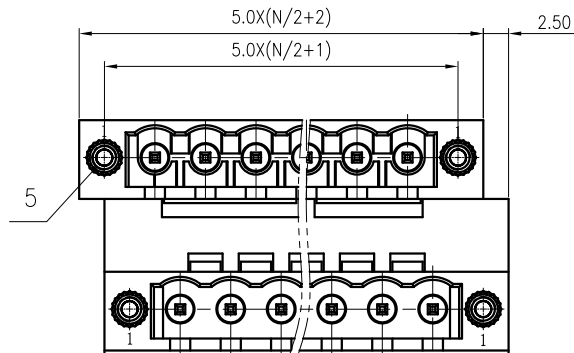


PCB LAYOUT

公差/General tolerances(mm)											0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315
~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20
												±Z

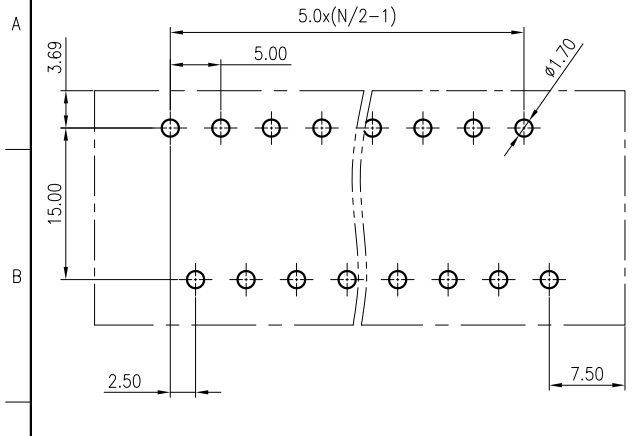

5	Nut	Copper alloy	
4	Pin header 2	Copper	Sn Plated
3	Pin header 1	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电压/Rated Voltage(V)/Current(A)		B	C
IEC 标准/IEC Standard:		300/15	300/10
过电压类别/Overvoltage Category/污染等级/ Pollution Degree			
额定电压/电压/Rated Voltage(V)/Current(A)		III/3	III/2
额定脉冲电压(kV)/Rate Impulse Voltage(kV)		/	320/10
线数/线数/Poles		/	4
使用温度范围/Operating temperature(°C)		N=04~48P	
符合RoHS环保要求/Conform to RoHS		-40~+105	
		Yes	

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司		
STATUS: /	NINGBO DEGSON ELECTRICAL CO., LTD		
APPD: Lan ChH 2020.05.18	NAME:		
CHKD: /	2EDGVTM-5.0-XXP-1Y-00A(H)		
DRFT: YangYSh 2006.06.18	DRAWING NO.: 10002007		REV TO
REV	ECN	DESCRIPTION	DRFT DATE
①	SIZE: A3	SCALE: 2:1	SHEET 1/1

