



active

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	04/27/06
△		增加VDE、CE标志	LJH	11/12/07
△		修改焊脚厚度尺寸	LJH	05/17/08

- Notes:
- Pitch:3.5mm , Poles:2-24P
 - Rated voltage/current:UL 150V/10A
VDE 130V/10A
 - Operation temperatures:-40℃~+105℃
 - Withstanding Voltage:AC2000V/1Min
 - Insulation Resistance:5000MΩ/DC1000V
 - Wire Range:26~16AWG, 1.0mm²
 - Max. Torque Value:M2, 2.04kgf. cm
 - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	over	over			
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	∩		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	□

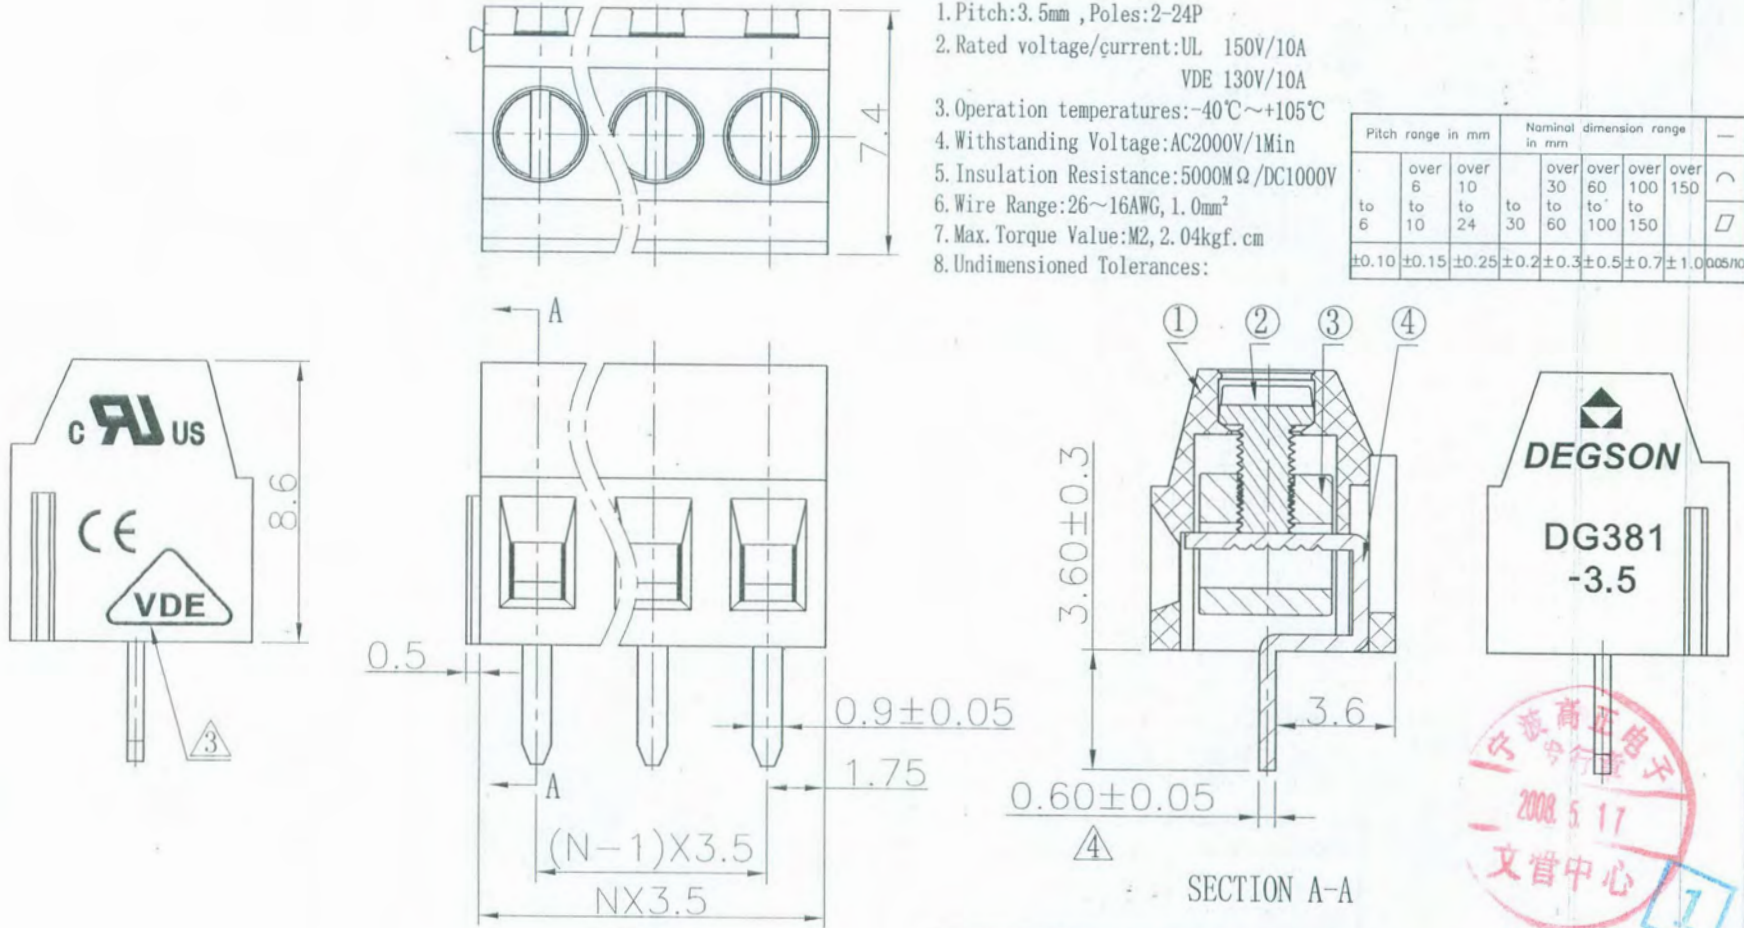

4	DG381 Pin header	4047B00010(H)	XX	Phosphor bronze	SnCe
3	DG381 Cage	X000000300(H)	XX	Brass	Ni plated
2	DG381 Screws	S000001440(H)	XX	Steel	Cr ³⁺ Zn

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG381-3.5-Housing	4032A0YXXA(H)	1	PA66	UL94V-0
TOLERANCES EXCEPT AS NOTED		DATE: 05/16/05	DATE: 05/17/08	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MATERIAL:		NAME: DG381-3.5-XXP-1Y-00A(H)			
FINISH:		DRAWING NO. DG381-3.5-E02		SIZE: A3	REV: T4
SCALE:		DO NOT SCALE DRAWING		SHEET: 1	OF: 1