






未注公差/General tolerances(mm)												0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

A



B

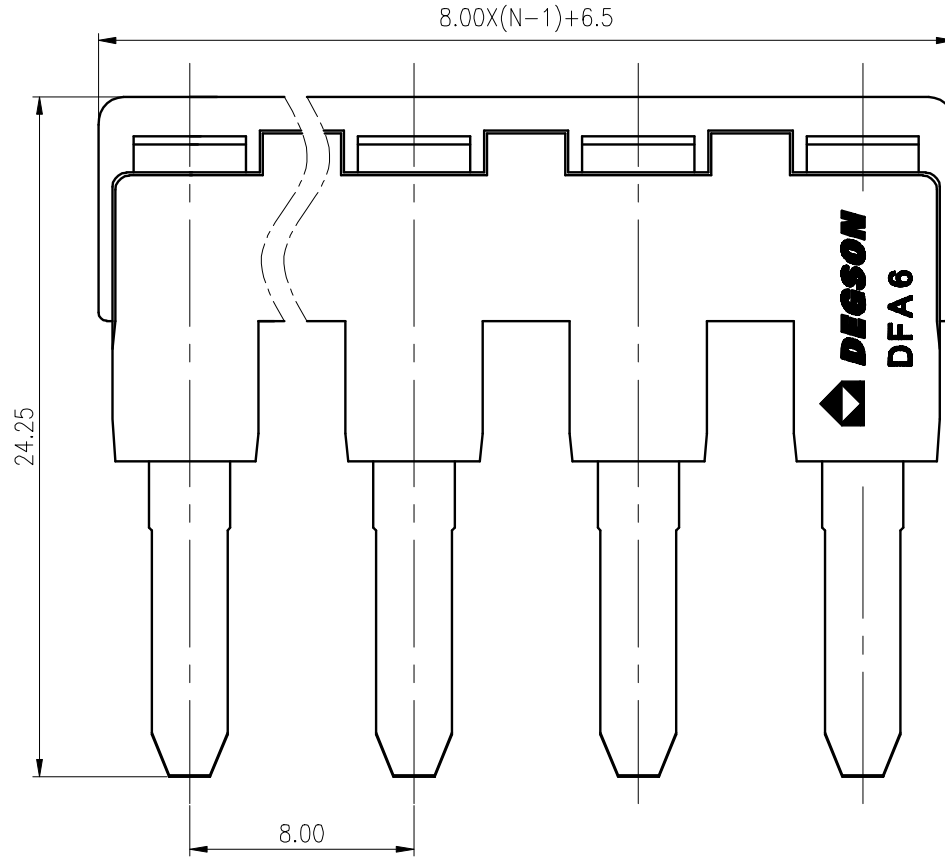

C

D

3	Bridgware	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles		8.00/N=02~10P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /	SURFACE: /												
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD												
STATUS: /													
APPD: Li GL 2020.06.04	NAME: DFA6-XXP-1Y-00A(H)												
CHKD: Mao J 2020.06.04	DRAWING NO.: DFA6-C01												
DRFT: ZhengQG 2020.06.04	REV	TO											
<table border="1"> <thead> <tr> <th>REV</th> <th>ECN</th> <th>DESCRIPTION</th> <th>DRFT</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	REV	ECN	DESCRIPTION	DRFT	DATE						TYPE: CUSTOMER DRAWING	SCALE: 4:1	SHEET 1/1
REV	ECN	DESCRIPTION	DRFT	DATE									

1

2

3

4

5

6