

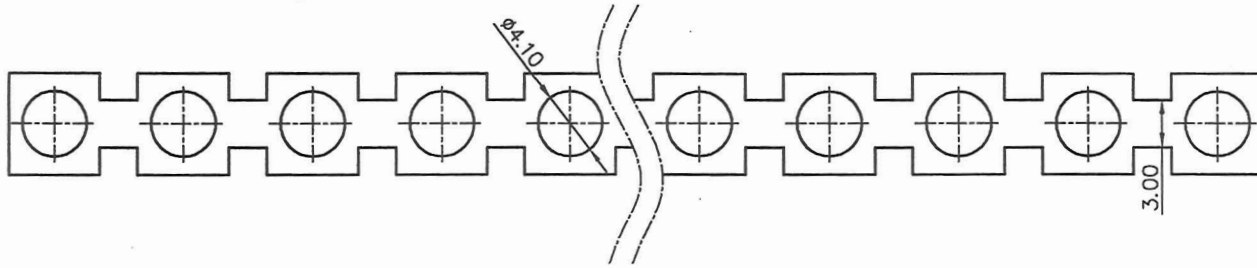


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



$8.2X(N-1)+5.8$

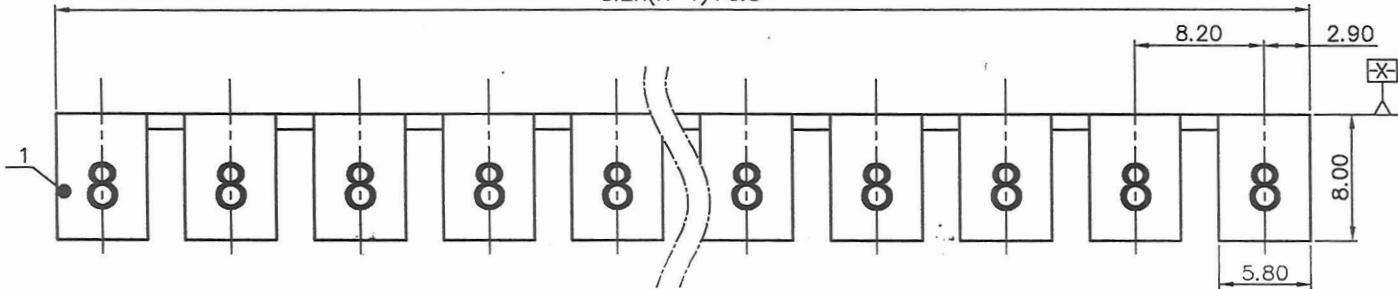

NOTES1:

UL Standard

1.Torque value : M4 , 10.53lb.in

IEC Standard

1.Torque value : M4 , 1.2N·m

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 8.2mm, Poles : N=02~10P

3.Material: T2Y2

4.Plating: Cu plated at the bottom is more than 2um; Sn plated at the bottom is more than 4um

5.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm							-0.1/10
	Over 6 TO 10	Over 10 TO 24	Over 24 TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

6.RoHS Compliance

Current carrier and screws should be packed individually, which must be put in the same box

齐策专用  
2016.08.23  
(仅限内部使用,对外无效)



ITEM	NAME OF PART	MATERIAL	NOTES
2	Screw	COPPER ALLOY	Ni plated
1	Current carrier	COPPER ALLOY	Sn plated

DETACHED LISTS	PART NO.: /	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Aaron 8/19/16	NAME: FBIXX-8		
	CHKD: ZYK 08/20/16	TITLE: CUSTOMER DRAWING		
	DRFT: Ding 08/19/16	DRAWING NO.: FBIXX-8-C01	REV	TO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE	1:1

