

未注公差/General tolerances(mm)											0.1/10 ±2'		
0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315		>315 ~400	>400 ~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50





A

B

C

D

02P: Clasp is on the left from this view

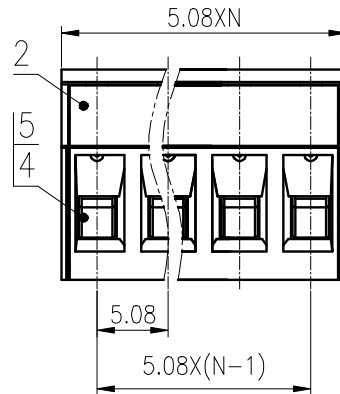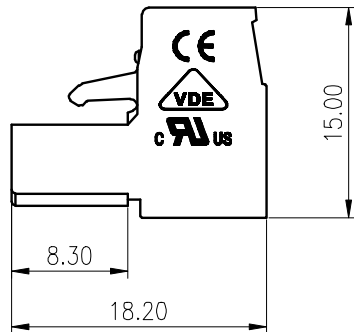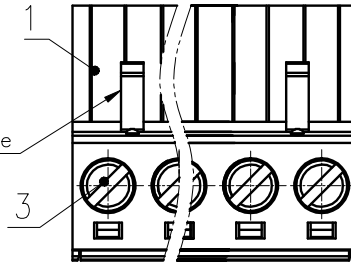

5	Clamp	Copper alloy	Sn plated
4	Cage	Copper alloy	M3/Ni plated
3	Screw	Steel	M3/Zn plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电压/Rated Voltage(V)/Current(A)		B	C D
		300/15	/ 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree			III/2
额定电压/电压/Rated Voltage(V)/Current(A)			320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)			4.0
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M3 0.5/4.43
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)			1.0~2.5/28~12
间距/Pitch(mm)/线数范围/Poles			5.08/N=02~24P
剥线长度/Stripping length(mm)			7-8
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes
标准颜色编号/Standard color number:			/
PANTONE / RAL			/

MATERIAL:	SURFACE:		
MAT NO.:	/		
STATUS:	/		
APPD:	NAME:		
CHKD:	2EDGK-5.08-XXP-1Y-1000A(H)		
DRFT: Fan JY.2020.03.24	DRAWING NO.:	10001600	REV TO
⊕	SIZE: A4	SCALE: 2:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6