
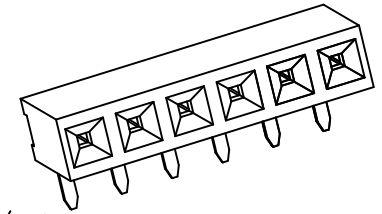


active

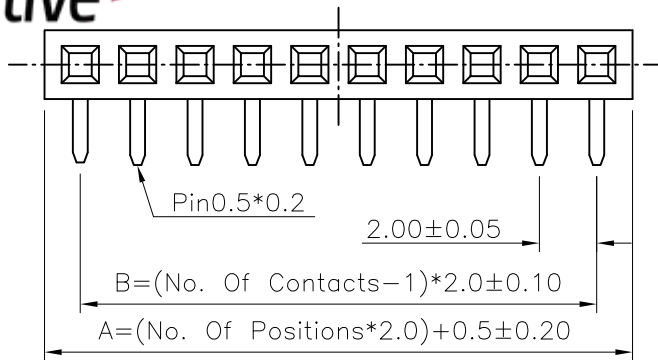

Specifications:

Current Rating: 2.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m Ohm Max.
 Withstanding Voltage: 500V AC/Minute
 Insulation Resistance: 1000M Ohm Min.
 Operating Temperature Rating: -40°C ~ +105°C


Materials and Finish

Insulator: PBT (UL94V-0)
 Insulator: Black
 Contact Material: Phosphor Bronze
 Plated: Gold Plated

How to Order

2209R-XXG

Gold Plated
 No. Of Positions
 Right Angle

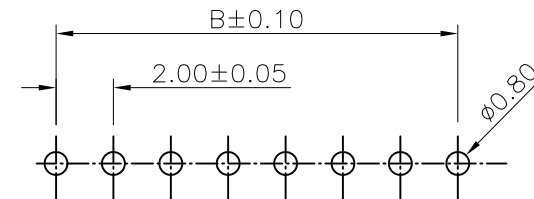


PCB Layout

RoHS Compliant



Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
2	4.50	2.00	11	22.50	20.00	25	50.50	48.00
3	6.50	4.00	12	24.50	22.00	28	56.50	54.00
4	8.50	6.00	13	26.50	24.00	30	60.50	58.00
5	10.50	8.00	14	28.50	26.00	33	66.50	64.00
6	12.50	10.00	15	30.50	28.00	35	70.50	68.00
7	14.50	12.00	16	32.50	30.00	38	76.50	74.00
8	16.50	14.00	18	36.50	34.00	40	80.50	78.00
9	18.50	16.00	20	40.50	38.00			
10	20.50	18.00	23	46.50	44.00			

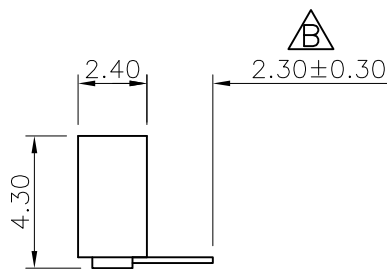

REV	DATE	FILE	BY
E			
D			
C	29-Jan-2018	更新表格	Jack Huang
B	06-APR-2012	ECN-TW1204002	Allen
A	17-JAN-2009		Allen

DRAWN: Allen
CHECKED: Jerry Chen
APPROVAL: Mike Wu

GENERAL TOLERANCE: .X = ±0.2 .XX = ±0.15
UNIT: MM
SCALE:
SHEET: 1 / 1
PROJECTION:

Neltron Industrial Co., Ltd.
DESCRIPTION: 2.0mm PCB Socket Single Row Right Angle
PART NO: 2209R-XXG

SIZE A4
