


Specifications:  
 Current Rating:2.0A AC,DC  
 Voltage Rating:250V AC,DC  $\triangle C$   
 Contact Resistance:20m ohm.Max  
 Insulation Resistance:1000M ohm.Min  
 Withstanding Voltage:500V AC/minute  
 Operating Temperature Range:-25°C~+85°C  $\triangle C$

Material:  
 Insulator:Nylon 66 (UL94V-0)  
 Insulator Color:ivory  
 Contact:Brass  
 Plated:Tin Plated

How To Order  
 $\triangle D$  2417SJ2-XX  
 No. of Contacts  
 Double Rows  
 Straight Type

Dimension:  $\triangle C$

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
4	6.0	2.0	22	24.0	20.0
6	8.0	4.0	24	26.0	22.0
8	10.0	6.0	26	28.0	24.0
10	12.0	8.0	28	30.0	26.0
12	14.0	10.0	30	32.0	28.0
14	16.0	12.0	32	34.0	30.0
16	18.0	14.0	34	36.0	32.0
18	20.0	16.0	40	42.0	38.0
20	22.0	18.0			

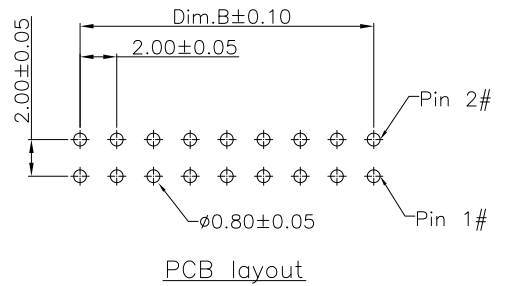

RoHS Compliant

F				DRAWN: Cel King
E	20-FEB-2020	新增包裝圖	Lisy Liu	
D	26-OCT-2017	ECN-TW1710004	Jack Huang	CHECKED: Jeremy Liu
C	09-MAY-2014	ECN-TW1405001	Cherry	
B	24-DEC-2013	ECN-TW1312012	Cherry	APPROVAL: Mike Wu
A	02-JAN-2006		Cel King	
REV	DATE	FILE	BY	

GENERAL TOLERANCE: .X=±0.35 $\triangle C$ .XX=±0.25
UNIT: MM
SCALE: 1:1
SHEET: 1/1
PROJECTION:

<b>Neltron Industrial Co., Ltd.</b>	
DESCRIPTION: 2.0mm Wire To Board Wafer Straight Type	SIZE
PART NO: 2417SJ2-XX $\triangle D$	<b>A4</b>

A  
B  
C  
D