


Specifications:
 Current Rating: 2.0A AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40°C ~ +105°C \triangle B

Material And Finish:
 Insulator: Thermoplastic (UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy
 Plated: Gold/Matte Tin/Selective Gold Plated

How To Order
 2208S-XXX

G:Gold Plated
 MT:Matte Tin Plated
 SG:Gold Plated On Contact Area,
 Matte Tin Plated On Solder Tail.
 No. Of Contacts
 Straight Type

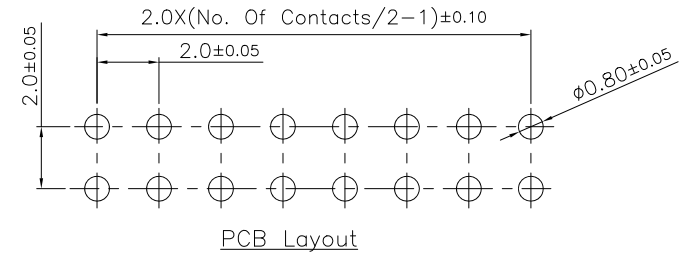

RoHS Compliant

F				DRAWN: CHIKO	GENERAL TOLERANCE: .X=±0.30 .XX=±0.20	Neltron Industrial Co., Ltd.	DESCRIPTION: 2.0mm Pitch Straight Type Header	SIZE A4
E								
D				CHECKED: JERRY	UNIT: MM	PART NO: 2208S-XXX		
C					SCALE: 1:1			
B	07-MAY-2024	Modify temperature	YIZHEN	APPROVAL: RORY	SHEET: 1/1			
A	15-AUG-2022		CHIKO		PROJECTION:			
REV	DATE	FILE	BY					