


Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	6.7	—	14	24.7	18.0
4	9.7	3.0	16	27.7	21.0
6	12.7	6.0	18	30.7	24.0
8	15.7	9.0	20	33.7	27.0
10	18.7	12.0	22	36.7	30.0
12	21.7	15.0	24	39.7	33.0

Specifications:
 △ Current rating: 1.0~7.0A AC, DC
 Voltage rating: 250V AC, DC
 Contact resistance: 10m ohm Max
 Insulation resistance: 1000M ohm Min
 Withstanding voltage: AC 1500V AC/minute
 Operating Temperature: -25°C ~ +105°C

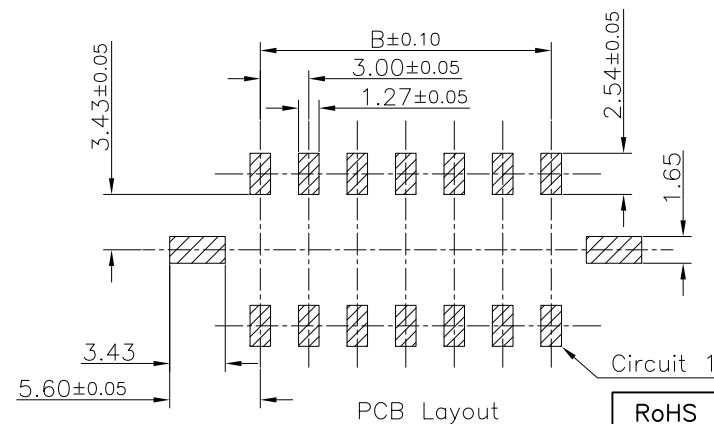


Materials:
 Insulator: High Temp Plastic (LCP UL94V-0)
 Insulator Color: Black
 Terminal: Copper Alloy
 Finish: Gold/Tin/Selective Gold Plated △

How to Order

5561S-XXX-SM1-CR

- CR: Cap&Tape&Reel
- SMD Type
- G: Gold Plated
- T: Tin Plated
- SG15: Selective Gold Plated 15u"
- No. Of Contacts
- Straight Type



RoHS Compliant

REV	DATE	FILE	BY
E			
D	13-MAY-2020	ECO-TW200003	Jamie Wang
C	03-May-2019	△	Romina Wu
B	25-Apr-2019	Modify Cap	Jamie Wang
A	18-OCT-2017		Jamie Wang

DRAWN: Jamie Wang
CHECKED: Jerry Chen
APPROVAL: Mike Wu

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
UNIT: MM
SCALE: 1:1
SHEET: 1 / 2
PROJECTION:

Neltron Industrial Co., Ltd.
DESCRIPTION: 3.0mm Pitch Power Wafer SMD Type
PART NO: 5561S-XXX-SM1-CR △

SIZE A4

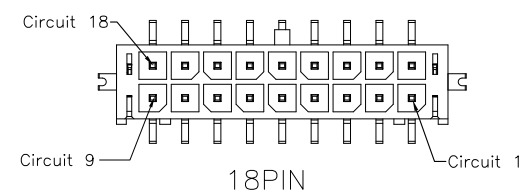
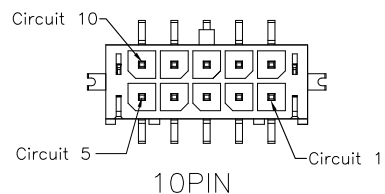

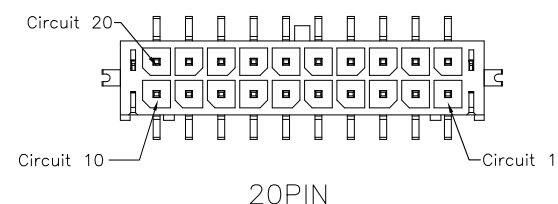
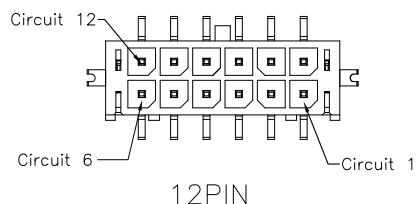

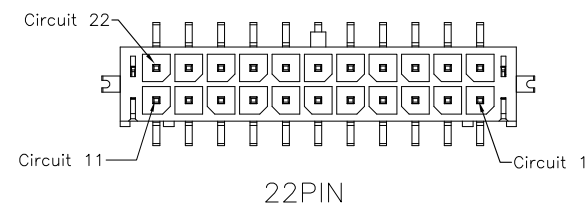
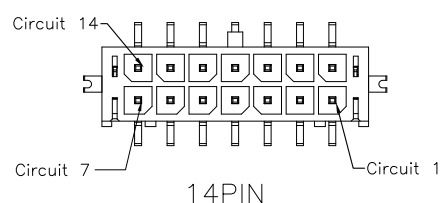

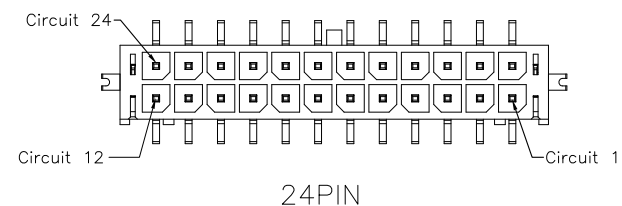
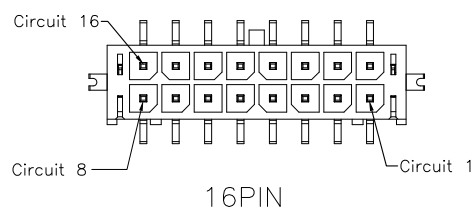

1

2





3

4

5



2~24P Protection Key Drawing(Ref.)

				DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	
D	13-MAY-2020	ECO-TW200003	Jamie Wang	CHECKED: Jerry Chen	UNIT: MM		DESCRIPTION: 3.0mm Power Wafer Protection key Drawing
C	03-May-2019		Romina Wu		SCALE:1:1		A4
B	25-Apr-2019	Modify Cap	Jamie Wang	APPROVAL: Mike Wu	SHEET: 2 / 2	PART NO:	
A	18-OCT-2017		Jamie Wang		PROJECTION: 	5561S-XXX-SM1-CR 	
REV	DATE	FILE	BY				