
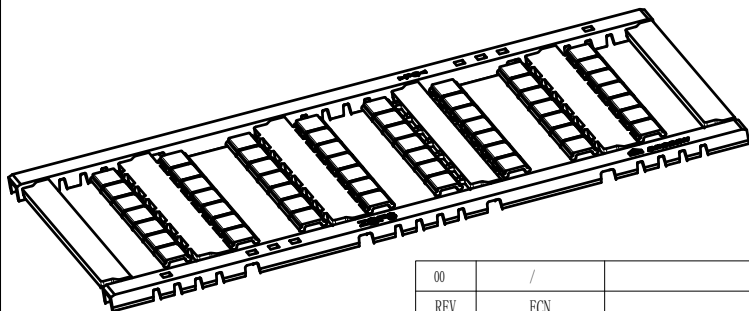


未注公差/General tolerances (mm)														0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	
间距/Pitch (mm) / 线数范围/Poles										8.2/N=56P				
使用温度范围/Operating temperature (°C)										-40~+110				
符合 RoHS 环保要求/Conform to RoHS										Yes				

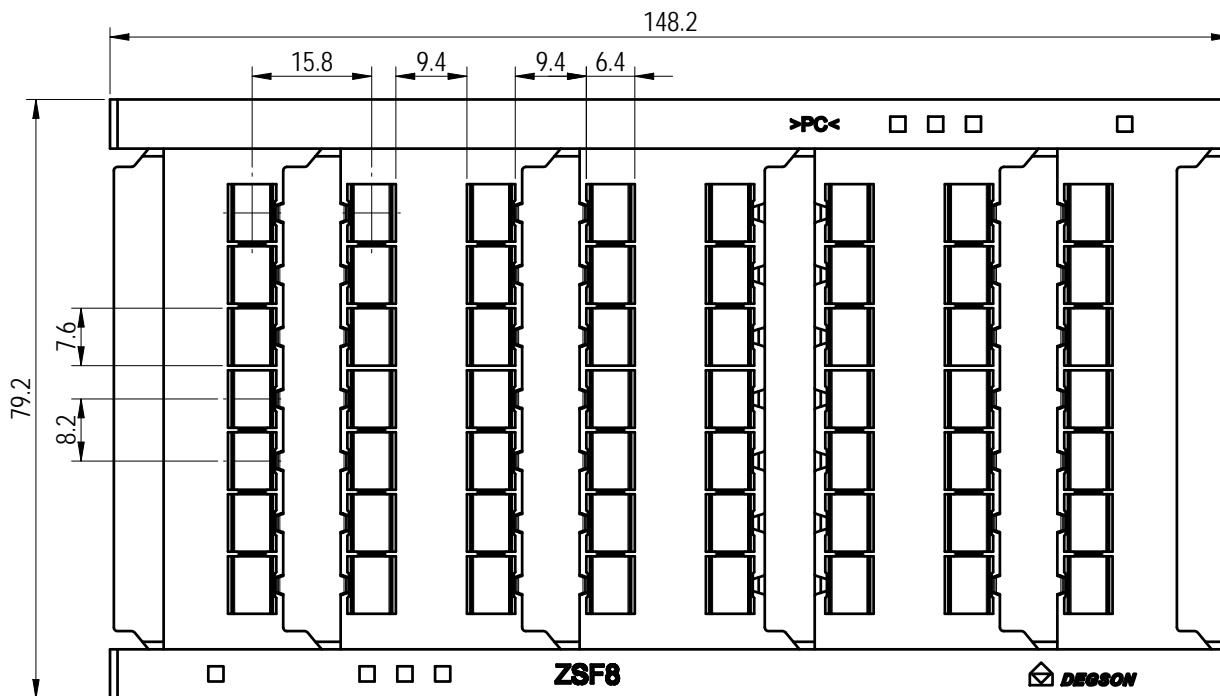

<b>DEGSON</b>		MATERIAL: PC	SURFACE/COLOR: /		
		MAT NO./REV: /	MAT STATUS: /		
APPD: Peng M	2022.06.09	NAME			
CHKD: Gao WG	2022.06.09	ZSF8-56P-1Y-00A (H)			
DRFT: Chen KZ	2022.06.09	DRAWING NO. /	TYPE CUSTOMER DRAWING	DRAWING STATUS /	SHEET 1/1
REV / ECN		DESCRIPTION		SCALE 1:1	

00	/	/	Chen KZ	2022.06.09
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by the copyright holder. All rights reserved for patent. 除专利声明外，其他任何形式之复制、传播、引用、分发等文件均受法律保护。未经权利人书面许可，不得复制或传播。 除专利声明外，其他任何形式之复制、传播、引用、分发等文件均受法律保护。 All rights reserved for patent.