

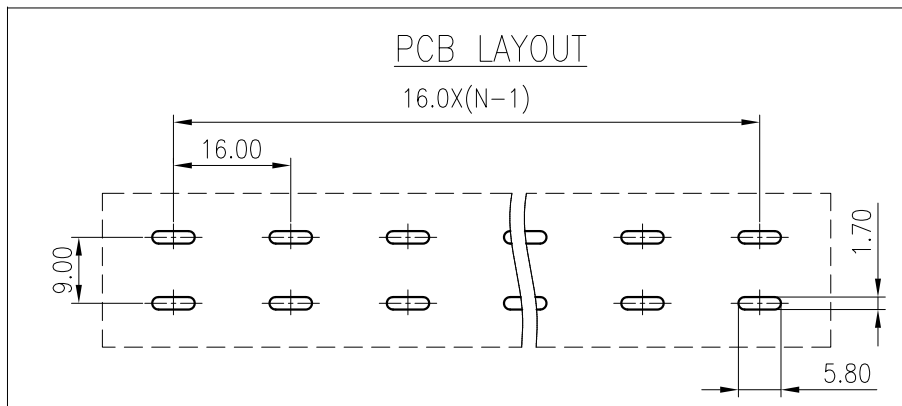


未注公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

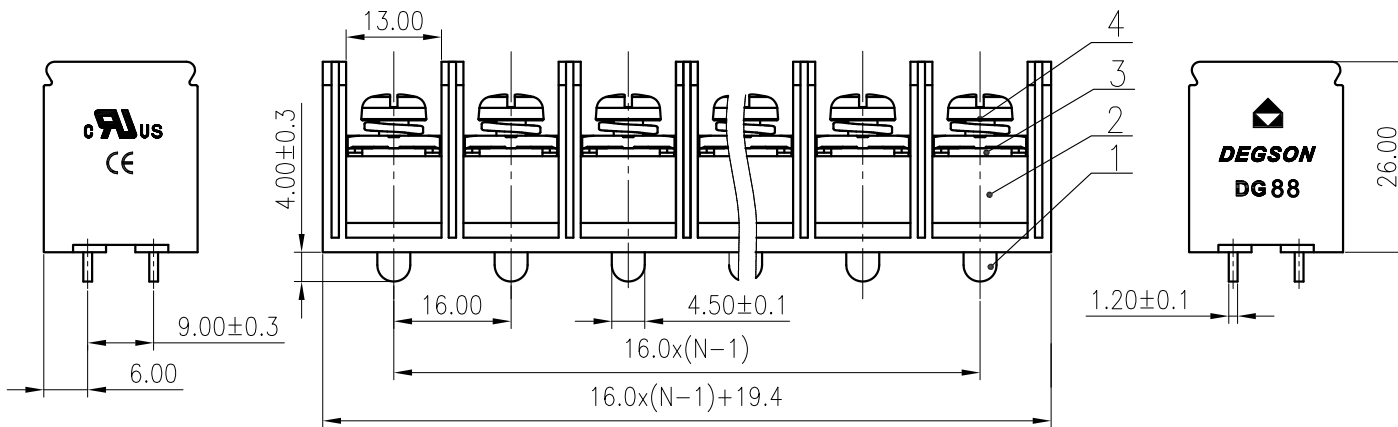

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screws	Steel	M5/Ni Plated
3	Nut	Steel	M5/Ni Plated
2	Housing	PA66	UL94V-0
1	Solder Pin	Copper	Sn Plated
JL 标准/UL Standard:		B	C
D		600/100	600/100
IEC 标准/IEC Standard:		600/101	1000/101
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
II/2		800/101	1000/101
额定电压/电流/Rated Voltage(V)/Current(A)		10	10
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		M5, 2.42/22	
螺丝扭矩/Torque Tightening(N·m/Lb.in)		2.5~25/14~3	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		16/N=02~20P	
间距/Pitch(mm)/线数范围/Poles		13~14	
剥线长度/Stripping length(mm)		-40~+105	
使用温度范围/Operating temperature(°C)		Yes	
符合RoHS环保要求/Conform to RoHS			

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:		NAME: DG88-XXP-1Y-00A(H)	
CHKD:		DRAWING NO.: DG88-C01	
DRFT: XHY 2013.12.12		REV	TO
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 1:1 SHEET 1/1

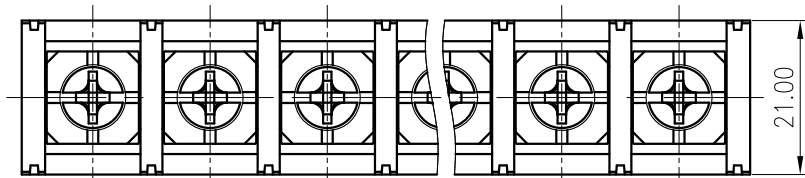

REV	ECN	DESCRIPTION	DRFT	DATE