


# 1104 KSS PCB SUPPORT

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural
- Stand on design to lock Print circuit board.
- Easy to fix or remove from PC board by hand without tool.

UNIT : mm

Item No.	H1	PCB		Chassis		Packing
		hole M1	thickness T1	hole M2	thickness T2	
RS-2D	2.5	4.0	1.8	5.0	3.2	100pcs
RS-3	3.5	4.0	1.8	5.5	1.4	
RS-5	5.0	4.0	1.8	5.5	1.8	
RS-5D	5.0	4.0	1.8	5.0	3.2	
RS-5S	5.0	3.0	1.7	4.8	2.0	
RS-6	6.1	4.0	1.8	5.5	1.8	
RS-6A	5.6	4.0	1.6	6.4	1.8	
RS-6B	5.6	4.0	1.8	6.4	1.4	
RS-6C	6.1	4.2	1.8	5.2	1.4	
RS-6S	5.9	3.5	1.8	5.3	1.8	
RS-7A	6.6	4.0	1.6	5.4	1.6	
RS-8	8.0	4.0	1.8	5.5	1.8	
RS-8S	6.1	4.0	1.6	5.5	1.8	
RS-10	9.8	4.0	1.8	5.5	1.8	
RS-10S	9.3	4.0	1.6	5.5	1.8	
RS-10A	9.8	4.0	1.6	5.4	1.8	
RS-10L	9.8	4.0	1.6	5.5	1.8	
RS-12	12.0	4.0	1.8	5.5	1.8	
RS-12C	12.1	4.2	1.8	5.2	1.4	
RS-12H	11.8	4.0	1.6	5.5	1.8	
RS-14	14.0	4.0	1.8	5.5	1.8	
RS-18	18.0	4.0	1.8	5.5	1.8	

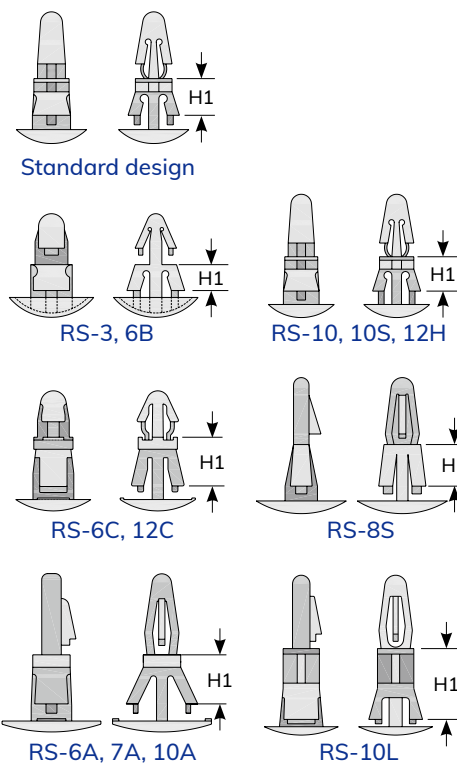

Wiring Ducts

Cable Markers

Cable Ties

Wrapping Bands

Cable Clamps & Tie Mounts

Glands, Bushings

Conduits

Bushings

Wire Connectors

Tubes

Cable Clips

PCB Parts

Fasteners

# 1105 KSS CIRCUIT BOARD EJECTOR

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural
- Pre-drill 2.5-2.6mm hole on PC board and press the ejector directly into PC board.
- Suitable for PCB thickness 1.6mm

UNIT : mm

Item No.	Dimension	Packing
BE-1	As Figure	100pcs

