
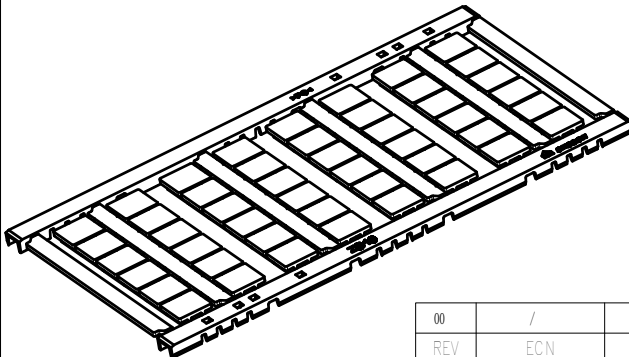
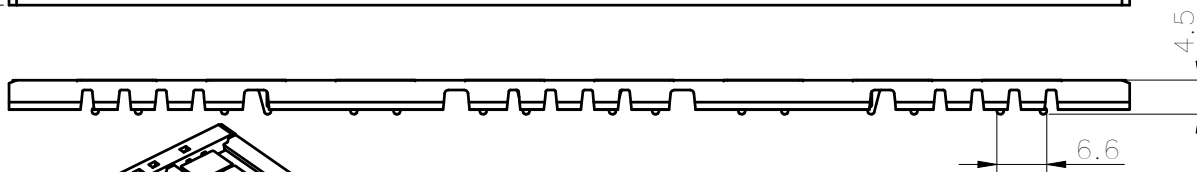


未注公差/General tolerances(mm)												0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
间距/Pitch(mm)/ 线数范围/Poles										10.2/N=48P			
使用温度范围/Operating temperature(°C)										-40~+110			
符合 RoHS 环保要求/Conform to RoHS										Yes			

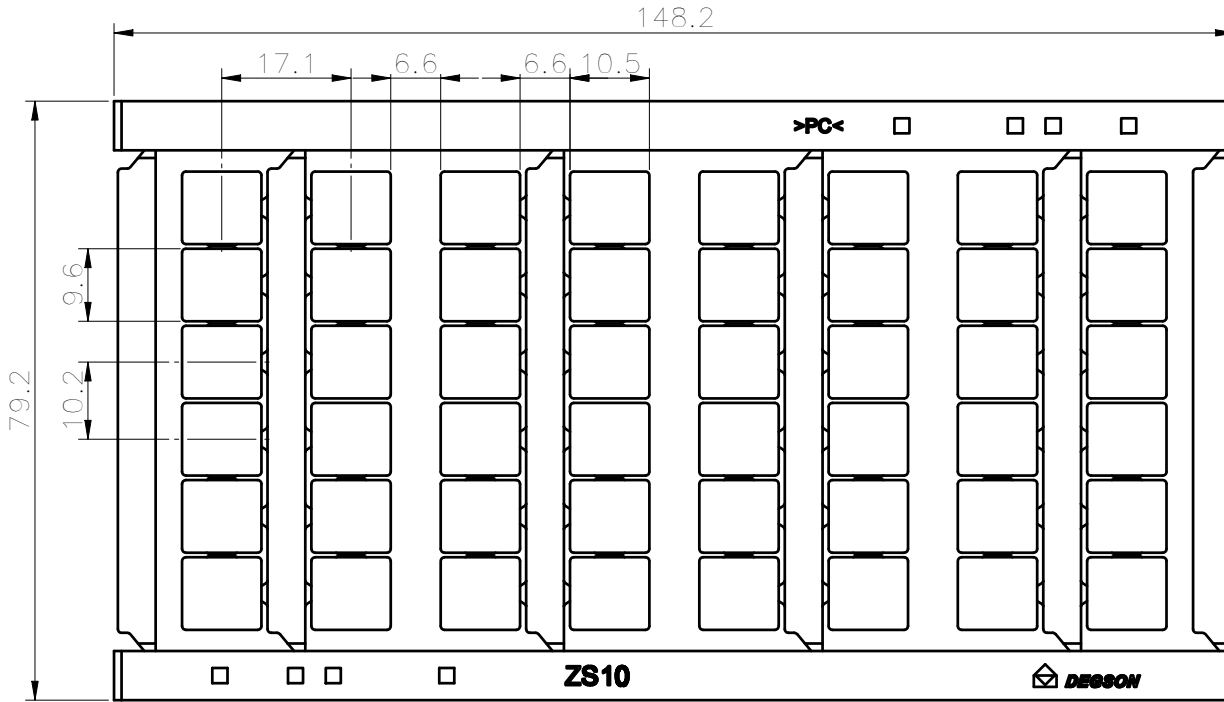

		MATERIAL: PC	SURFACE: /				
		MAT. NO./REV: /	MAT STATUS: /				
APPD: Peng M	2022.06.09	NAME					
CHKD: Gao WG	2022.06.09	ZS10-48P-1Y-00A(H)					
DRFT: Chen KZ	2022.06.09						
REV	ECN	DESCRIPTION	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
00	/	/	/	CUSTOMER DRAWING	/	1:1	1/1
DRFT	DATE						
Chen KZ	2022.06.09						

00	/	/	Chen KZ	2022.06.09
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. All rights reserved for patent, utility model or design registrations. 非经本厂明确授权, 否则禁止转让、复制、利用、交加本文件的内容。一经发现侵权, 本公司保留对侵权方追究法律责任的权利。