


1201 KSS WIRE SADDLE



- Material: **UL94V-0** flame rated, UL approved Nylon 66.
- Color: White

UNIT : mm

Item No.	Dimension				Mounting Hole M1	Thickness T1	Packing
	L	W1	H1	H2			
JWS-0402V0	5.0	4.5	5.1	2.8	3.5	0.5~1.6	100pcs
JWS-0504V0	5.1	5.3	6.3	4.4	3.5	0.5~1.6	





1201 KSS WIRE SADDLE



- Material: JWB-0706, JWS-0910 with **UL94V-2** flame rated, UL approved Nylon 66 Natural color.

UNIT : mm

Item No.	Dimension				Mounting Hole M1	Thickness T1	Packing
	L	W1	H1	H2			
JWB-0706	4.0	7.7	9.7	6.4	3.0	1.6	100pcs
JWS-0910	4.0	9.3	13.4	10.7	3.5	1.0	

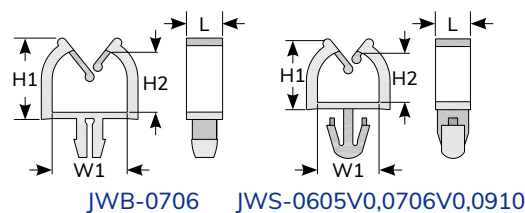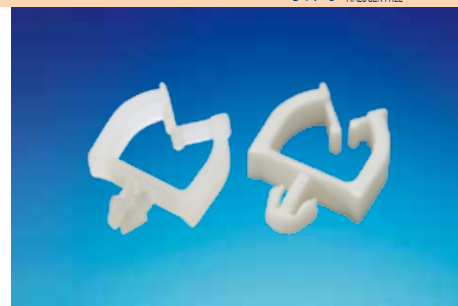

- Material: JWS-0605V0, JWS-0706V0 with **UL94V-0** flame rated, UL approved Nylon 66 White color.

UNIT : mm

Item No.	Dimension				Mounting Hole M1	Thickness T1	Packing
	L	W1	H1	H2			
JWS-0605V0	3.8	6.6	7.8	5.0	3.5	1.6	100pcs
JWS-0706V0	3.8	7.9	9.7	6.4	3.5	1.6	

1201 KSS LOCKING WIRE SADDLE



- Material: **UL94V-2** flame rated, UL approved Nylon 66.
- Color: Natural
- Application: Pre-drill 4.8mm hole PC board and fix the wire saddle, lock the wire in saddle with fingertip pressure. Can directing and gathering cable in any direction.

UNIT : mm

Item No.	Dimension				PCB		Packing
	W1	H1	H2	H3	Mounting Hole M1	Thickness T1	
KWS-0	11.0	13.0	4.0	9.0	4.8	2.0	100pcs
KWS-1	11.0	19.0	10.5	14.2	4.8	2.0	
KWS-2	11.0	27.0	19.0	23.0	4.8	2.0	
KWS-2L	10.4	18.0	12.0	15.0	4.8	4.0	
KWS-3	11.0	35.8	28.0	31.1	4.8	2.0	

