




1

2

3

4

5

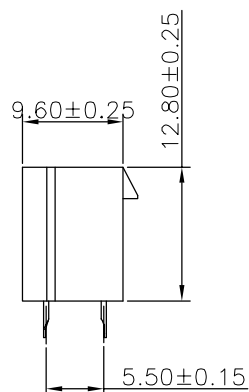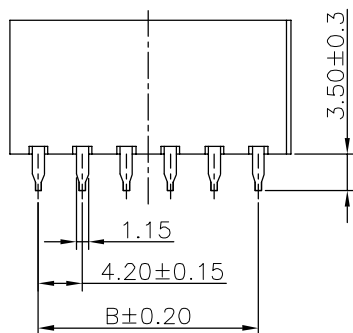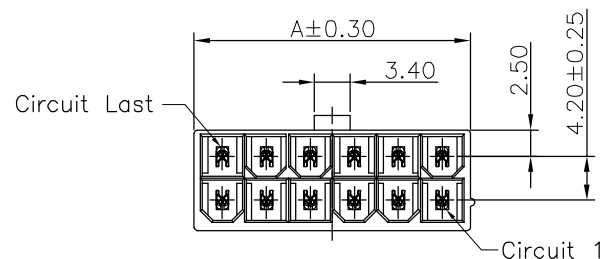

Specifications:

Current Rating:9.0A AC/DC
Voltage Rating:600V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:1500V AC For One Minute
Operating Temperature Range:-40°C To +105°C


Materials:

Insulator:Nylon 66 (UL94V-0)
Insulator Color:White
Terminal:Brass
Plating: Matte Tin Plated

How To Order:


2266S-XX-V0-F4A

UL94V-0
No. of Contacts
S:Staight Type Double Row



Dimension Information:

Pin.No	Dim.A	Dim.B	Pin.No	Dim.A	Dim.B
2	5.4	—	14	30.6	25.2
4	9.6	4.2	16	34.8	29.4
6	13.8	8.4	18	39.0	33.6
8	18.0	12.6	20	43.2	37.8
10	22.2	16.8	22	47.4	42.0
12	26.4	21.0	24	51.6	46.2

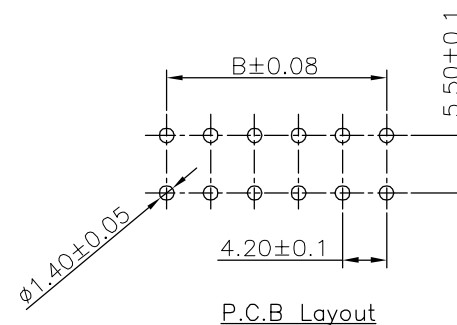

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	Neltron Industrial Co., Ltd.	DESCRIPTION: 4.2mm Power Wafer Double Rows Straight Type	SIZE A4
E			MEI	.X=±0.40 .XX=±0.30				
D			CHECKED:	UNIT: MM				
C			JERRY	SCALE: 1:1				
B			APPROVAL:	SHEET: 1/1	PART NO:	2266S-XX-V0-F4A		
A	28-Jul-2016		MEI	RORY	PROJECTION:			
REV	DATE	FILE	BY					













1

2



3

4

5

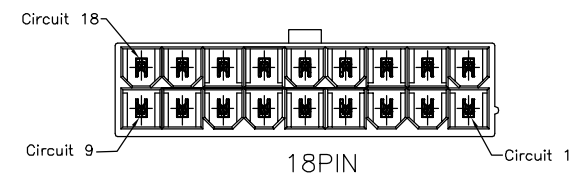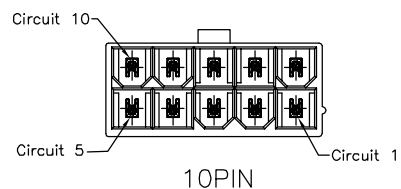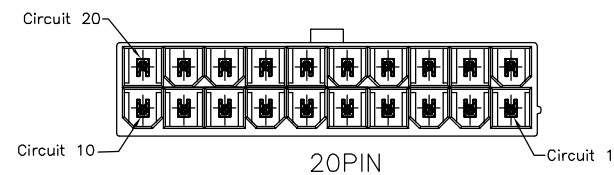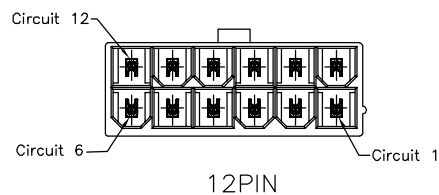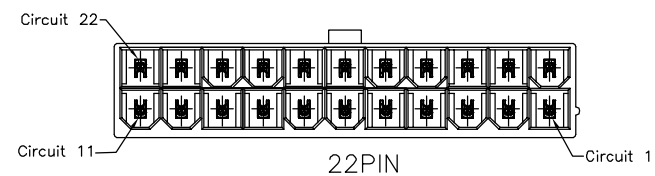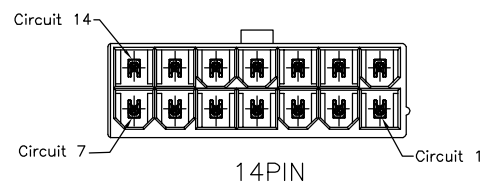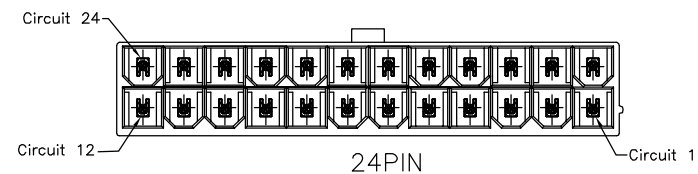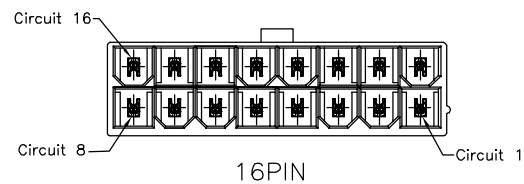

2~24P Protection Key Drawing(Ref.)

F				DRAWN: MEI	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	 Neltron Industrial Co., Ltd.	DESCRIPTION: 4.2mm Power Wafer Double Rows Straight Type	SIZE
E								
D				CHECKED: JERRY	SCALE: 1:1	PART NO: 2266S-XX-V0-F4A	A4	
C					APPROVAL: RORY			SHEET: 1/1
B					PROJECTION: 			
A	28-Jul-2016		MEI					
REV	DATE	FILE	BY					